

### **Power DomiLED**

With its significant power in terms brightness, viewing angle and variety of application possibilities, Power DomiLED truly is a standout performer! Ideal for automotive interior lighting as well as home, office and industrial applications, it is also a proven performer in electronic signs and signals.



### **Features:**

- > High brightness surface mount LED.
- > 120° viewing angle.
- > Small package outline (LxWxH) of 3.2 x 2.8 x 1.8mm.
- > Qualified according to JEDEC moisture sensitivity Level 2.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Minimum CRI of 90.
- > Compliance to automotive standard; AEC-Q101.



### **Applications:**

- > Automotive Interior Lighting  
(Dome lamp, map lighting, and trunk lighting)
- > Industrial Illumination.
- > White Goods Lighting.



## Optical Characteristics (T<sub>j</sub>=25°C)

Part Ordering Number	Color	Viewing Angle°	Luminous Flux @ IF = 60mA (lm) <sup>Appx. 1.2</sup>		
			Min.	Typ.	Max.
DWW-KJJ-MN2-5D8I	Cool White	120	13.9	15.8	20.6

Notes:

1. High color rendering index (CRI). Minimum CRI of 90 and min R9 of 65.


## Electrical Characteristics at T<sub>j</sub>=25°C

Part Number	V <sub>f</sub> @ If = 60mA <sup>Appx. 3.1</sup>			V <sub>r</sub> @ I <sub>r</sub> = 10µA <sup>Appx. 6.1</sup>
	Min. (V)	Typ. (V)	Max. (V)	Min. (V)
DWW-KJJ	2.90	3.10	3.50	5

## Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	80	mA
Peak pulse current; (tp ≤ 10µs, Duty cycle = 0.1)	120	mA
Reverse voltage; I <sub>r</sub> (max) = 10µA <sup>Appx. 6.1</sup>	5	V
ESD threshold (HBM)	2000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +110	°C
Storage temperature	-40 ... +125	°C
Power dissipation (at room temperature)	300	mW
Thermal resistance (Rated current = 60mA, Ts = 25 °C)		
- Real Thermal Resistance		
Junction / ambient, R <sub>th</sub> JA real	280	K/W
Junction / solder point, R <sub>th</sub> JS real	130	K/W

DWW, Color Grouping Appx. 2.1

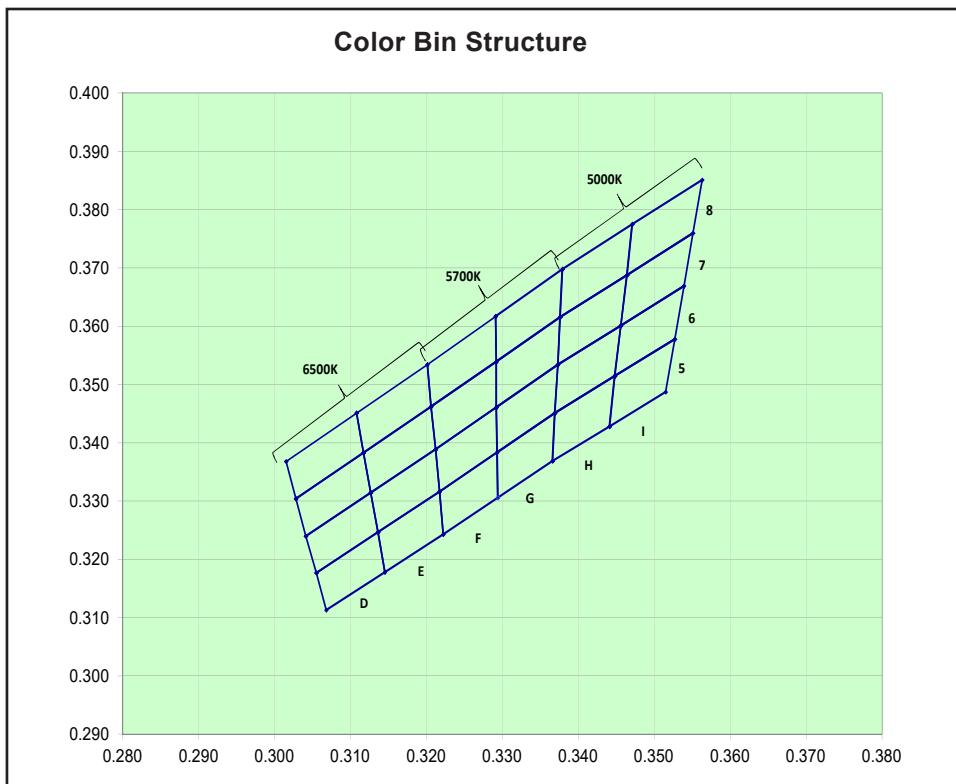

Bin		1	2	3	4
5F	Cx	0.3217	0.3293	0.3294	0.3222
	Cy	0.3316	0.3384	0.3306	0.3243
6F	Cx	0.3212	0.3292	0.3293	0.3217
	Cy	0.3389	0.3461	0.3384	0.3316
7F	Cx	0.3206	0.3212	0.3292	0.3292
	Cy	0.3462	0.3389	0.3461	0.3539
8F	Cx	0.3201	0.3291	0.3292	0.3206
	Cy	0.3534	0.3617	0.3539	0.3462
5G	Cx	0.3293	0.3294	0.3366	0.3369
	Cy	0.3384	0.3306	0.3369	0.3451
6G	Cx	0.3292	0.3293	0.3369	0.3373
	Cy	0.3461	0.3384	0.3451	0.3534
7G	Cx	0.3292	0.3292	0.3376	0.3373
	Cy	0.3461	0.3539	0.3616	0.3534
8G	Cx	0.3291	0.3292	0.3376	0.3379
	Cy	0.3617	0.3539	0.3616	0.3698
5H	Cx	0.3366	0.3369	0.3448	0.3441
	Cy	0.3369	0.3451	0.3515	0.3428
6H	Cx	0.3369	0.3373	0.3456	0.3448
	Cy	0.3451	0.3534	0.3601	0.3515
7H	Cx	0.3373	0.3376	0.3464	0.3456
	Cy	0.3534	0.3616	0.3688	0.3601
8H	Cx	0.3376	0.3379	0.3471	0.3464
	Cy	0.3616	0.3698	0.3775	0.3688

<b>Bin</b>		<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
5I	Cx	0.3441	0.3448	0.3527	0.3515
	Cy	0.3428	0.3515	0.3578	0.3487
6I	Cx	0.3448	0.3456	0.3539	0.3527
	Cy	0.3515	0.3601	0.3669	0.3578
7I	Cx	0.3456	0.3464	0.3551	0.3539
	Cy	0.3601	0.3688	0.3760	0.3669
8I	Cx	0.3464	0.3471	0.3563	0.3551
	Cy	0.3688	0.3775	0.3851	0.3760
8E	Cx	0.3108	0.3201	0.3206	0.3117
	Cy	0.3451	0.3534	0.3462	0.3383
7E	Cx	0.3117	0.3206	0.3212	0.3127
	Cy	0.3383	0.3462	0.3389	0.3315
6E	Cx	0.3127	0.3212	0.3217	0.3136
	Cy	0.3315	0.3389	0.3316	0.3247
5E	Cx	0.3136	0.3217	0.3222	0.3145
	Cy	0.3247	0.3316	0.3243	0.3178
8D	Cx	0.3015	0.3108	0.3117	0.3028
	Cy	0.3368	0.3451	0.3383	0.3304
7D	Cx	0.3028	0.3117	0.3127	0.3041
	Cy	0.3304	0.3383	0.3315	0.3240
6D	Cx	0.3041	0.3127	0.3136	0.3055
	Cy	0.3240	0.3315	0.3247	0.3177
5D	Cx	0.3055	0.3136	0.3145	0.3068
	Cy	0.3177	0.3247	0.3178	0.3113

InGaN wavelength is very sensitive to drive current. Operating at lower current is not recommended and may yield unpredictable performance current pulsing should be used for dimming purposes.







**Luminous Intensity Group at T<sub>j</sub>=25°C**





Brightness Group	Luminous Flux <sup>Appx. 1.2</sup> (lm)
M2	13.9 ... 15.8
M3	15.8 ... 18.1
N2	18.1 ... 20.6

**Vf Bining (Optional)**


Vf Bin @ 60 mA	Forward Voltage (V) <sup>Appx. 3.1</sup>
V0	2.70 ... 3.00
V1	3.00 ... 3.30
V2	3.30 ... 3.60

Please consult sales and marketing for special part number to incorporate Vf binning.

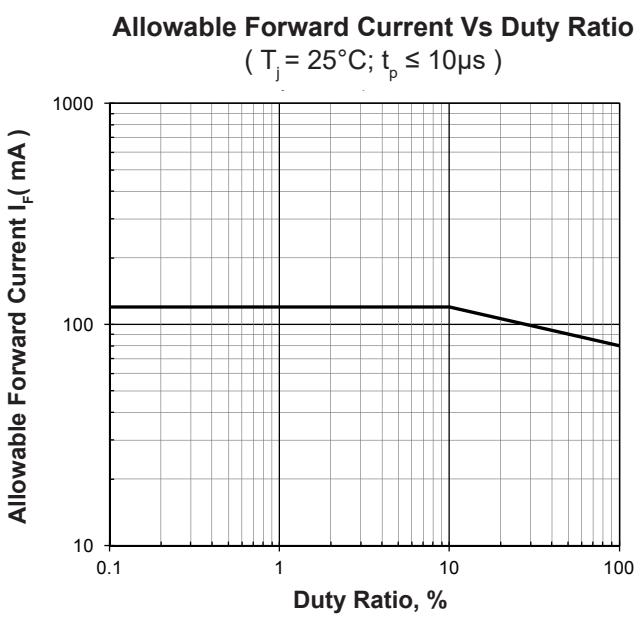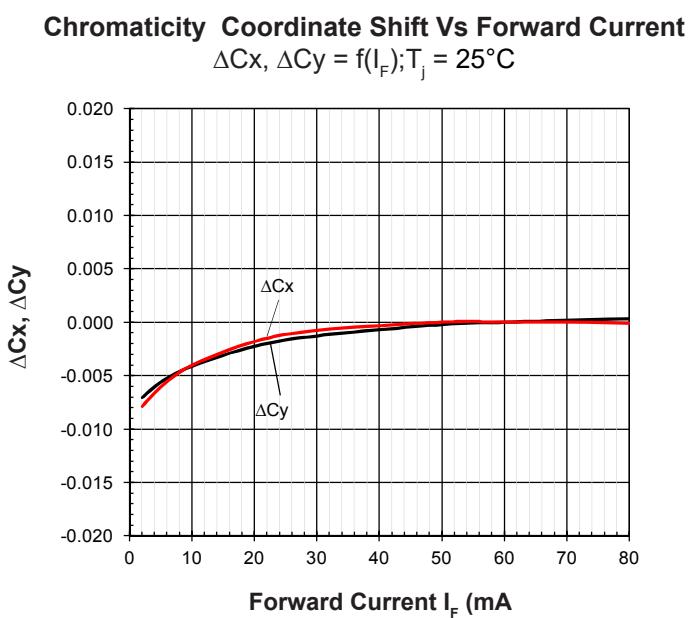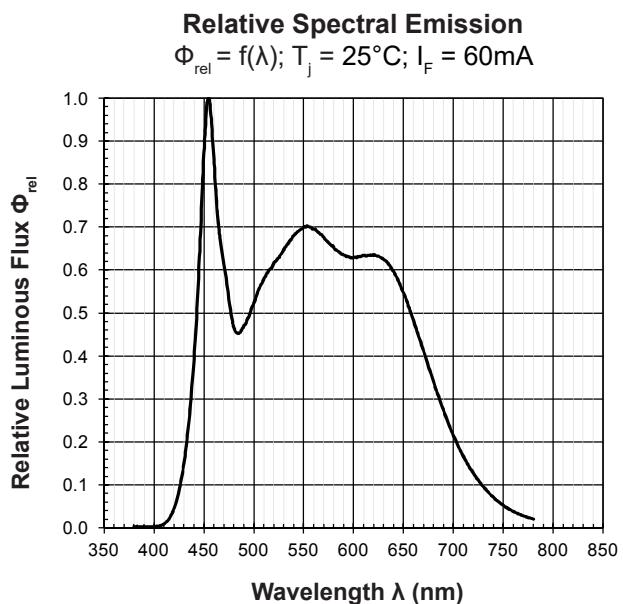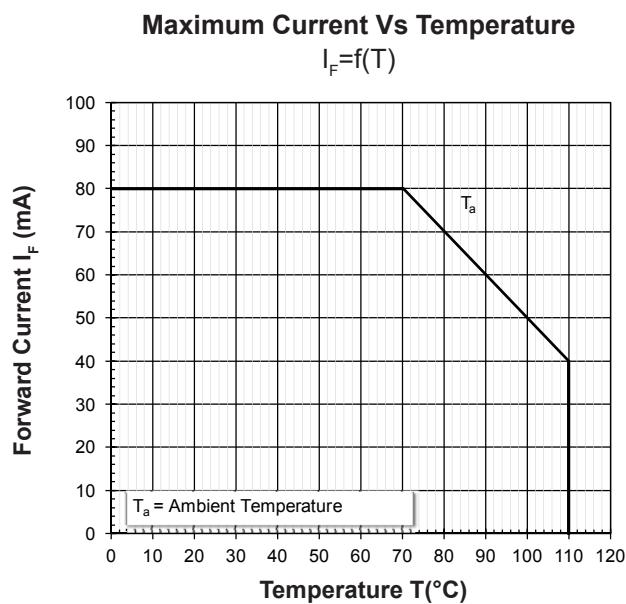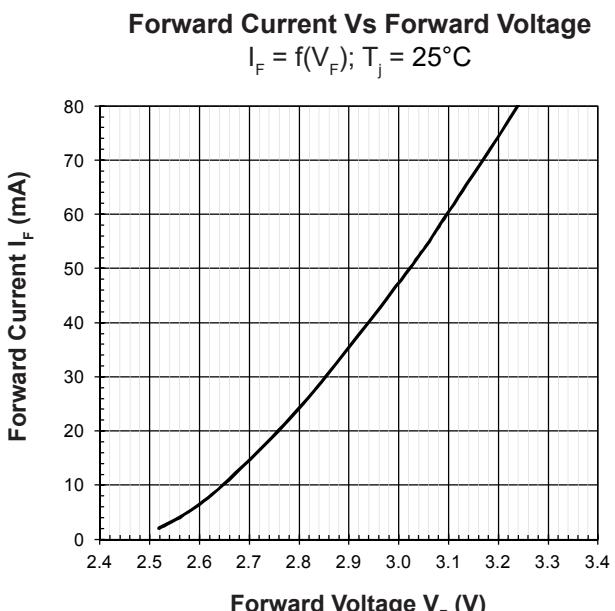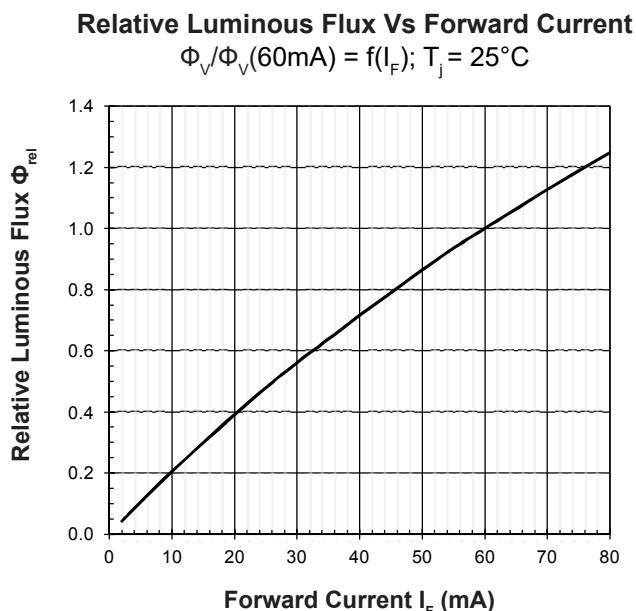

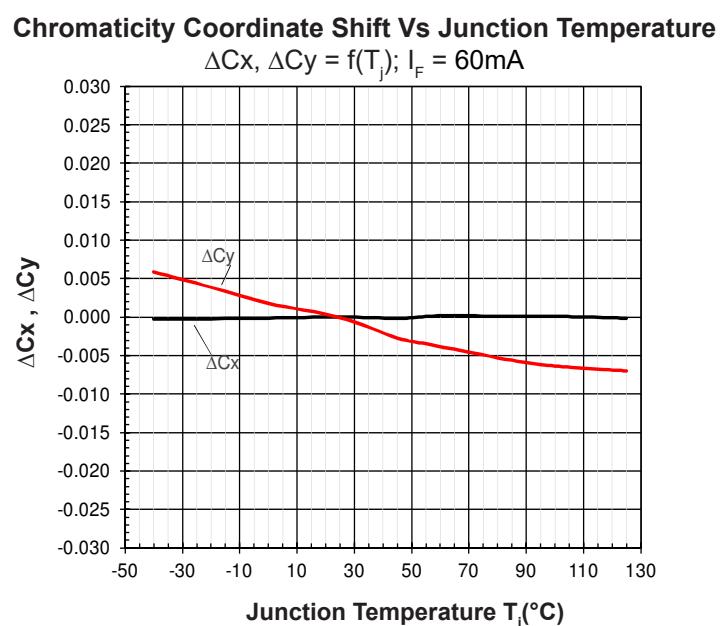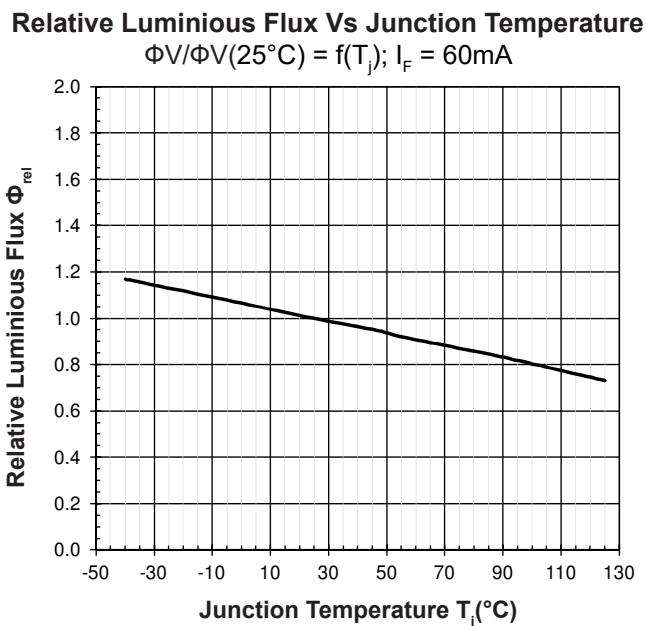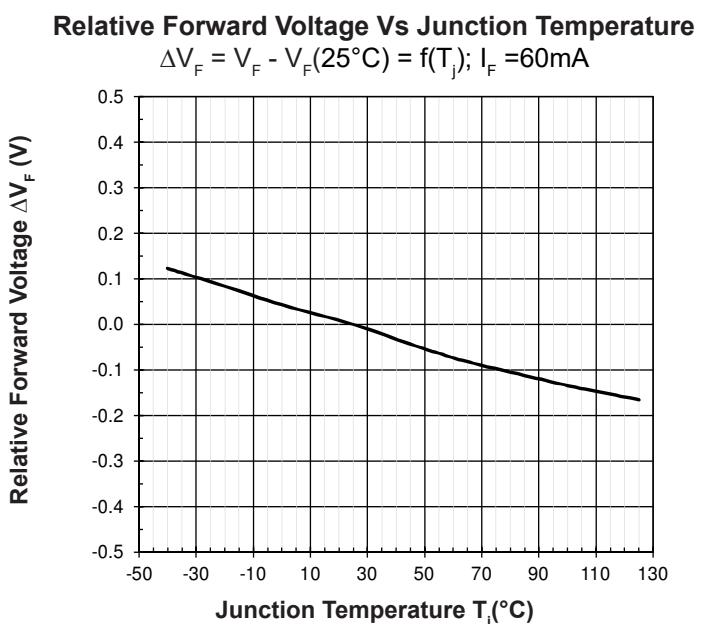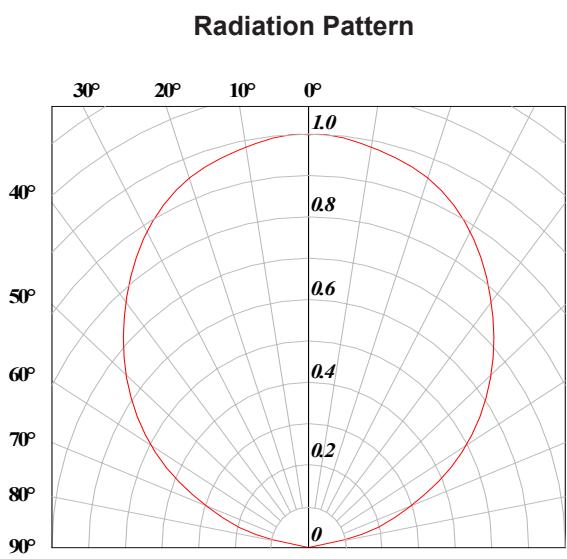


## Power DomiLED • InGaN : DWW-KJJ Package Outlines

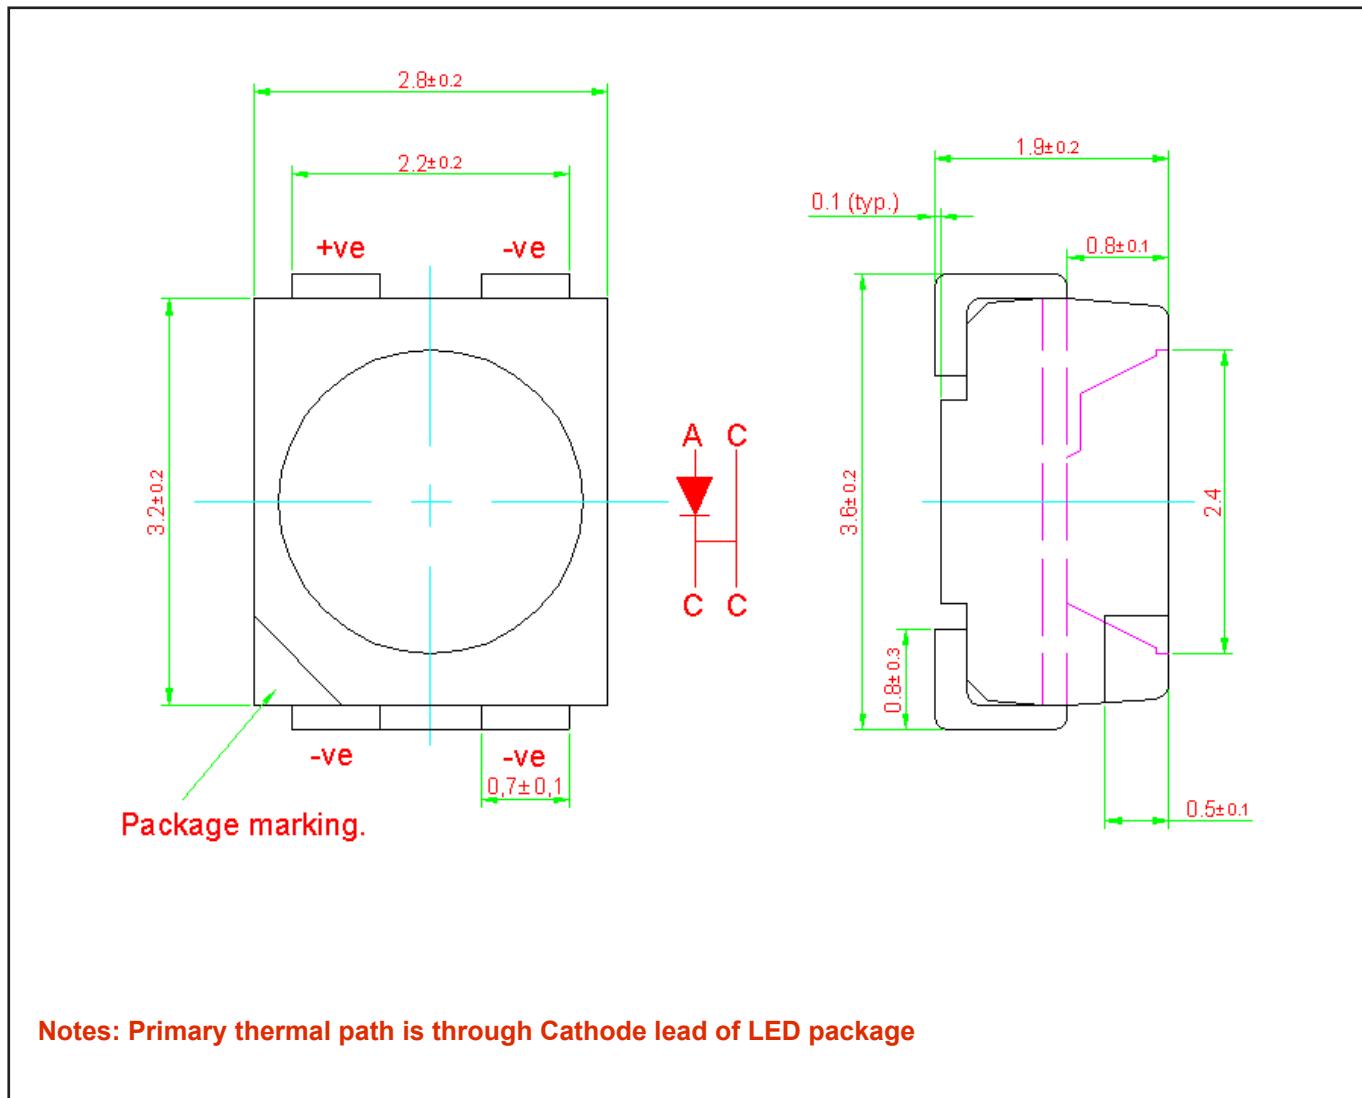


### Material

	Material
Lead-frame	Cu Alloy With Ag Plating
Package	High Temperature Resistant Plastic, PPA
Encapsulant	Silicone Resin
Soldering Leads	Sn Plating



## Recommended Solder Pad

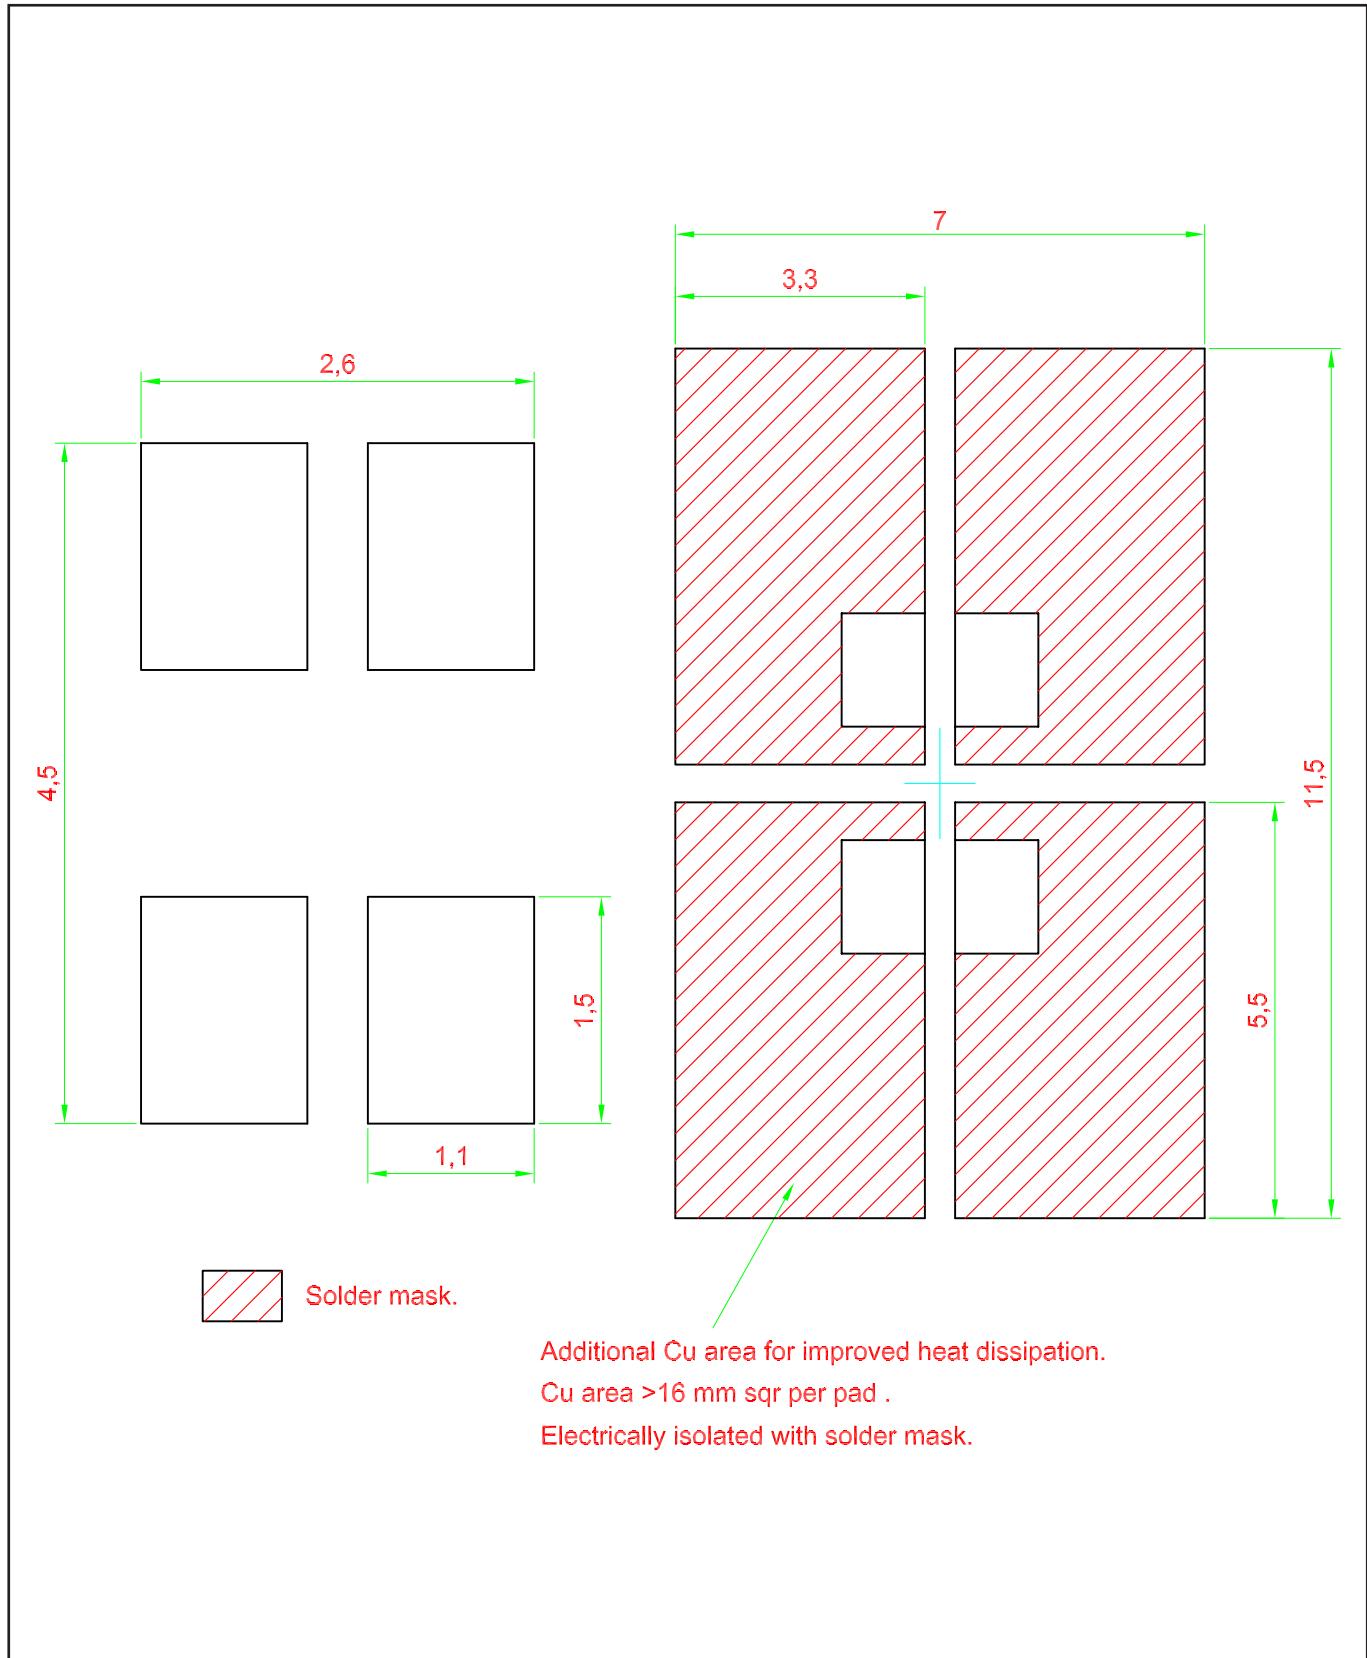

## Taping and orientation

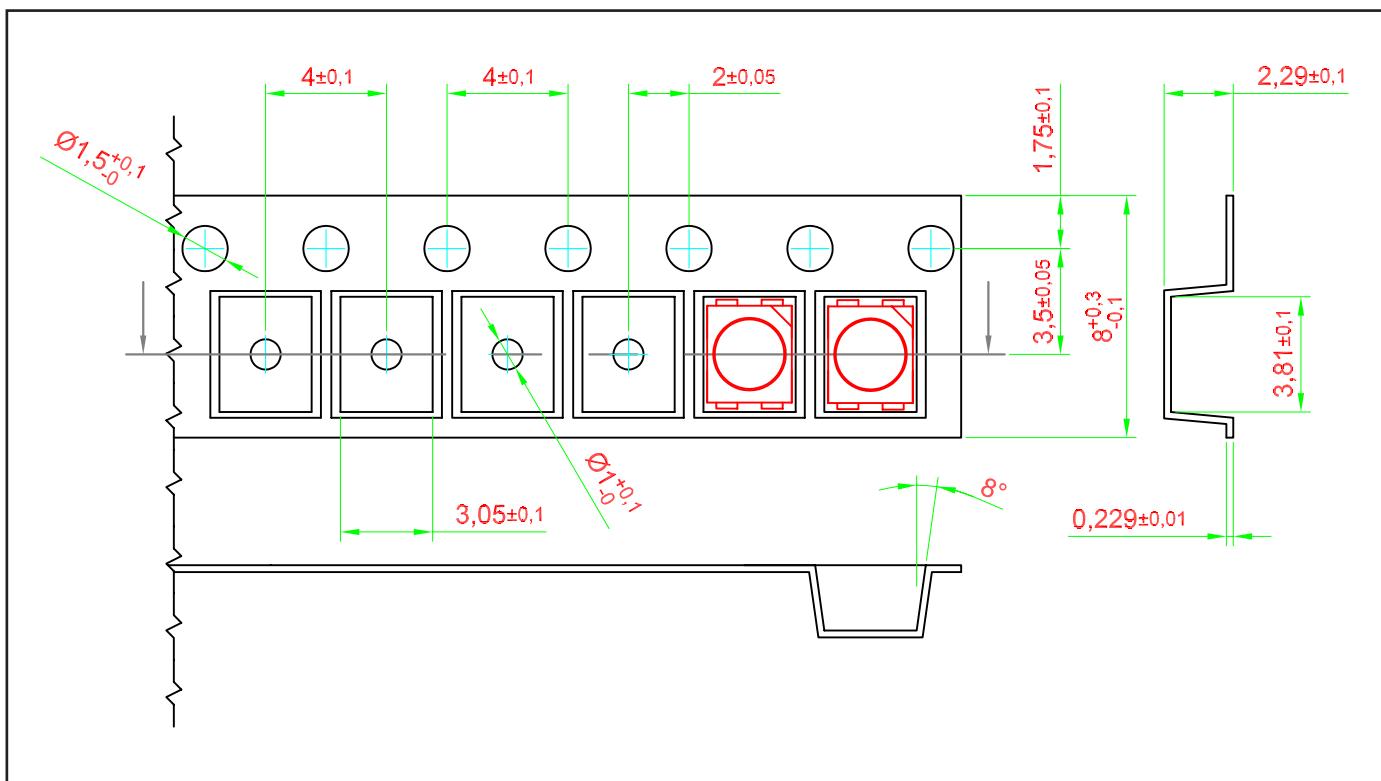


## Packaging Specification

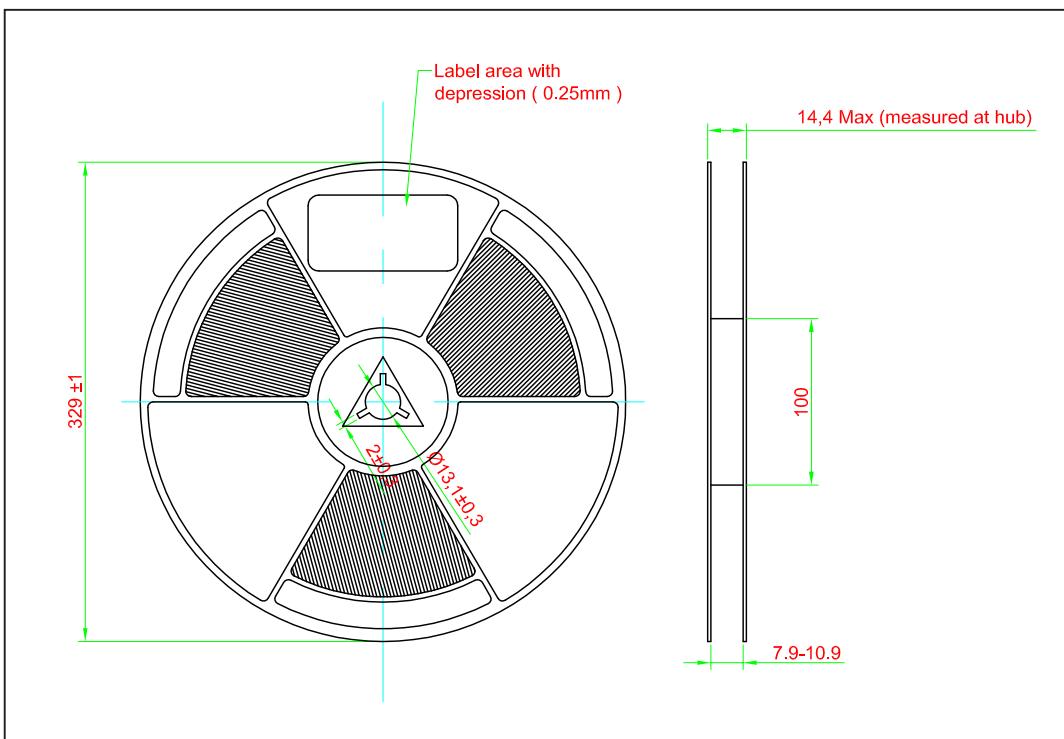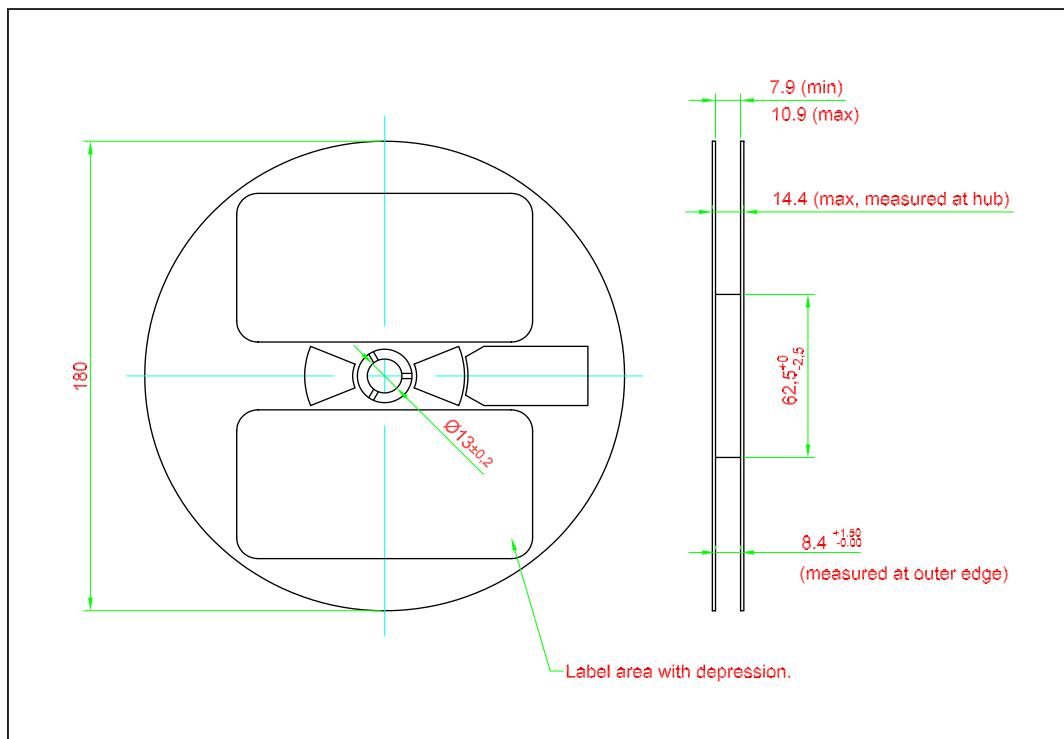


	Reel Diameter (mm)	Quantity (pcs)	Partno
Standard Packing	180	2000	DWW-KJJ-xxx-x
Optional Packing	329	8000	DWW-KJJ-xxx-x-8

## Packaging Specification

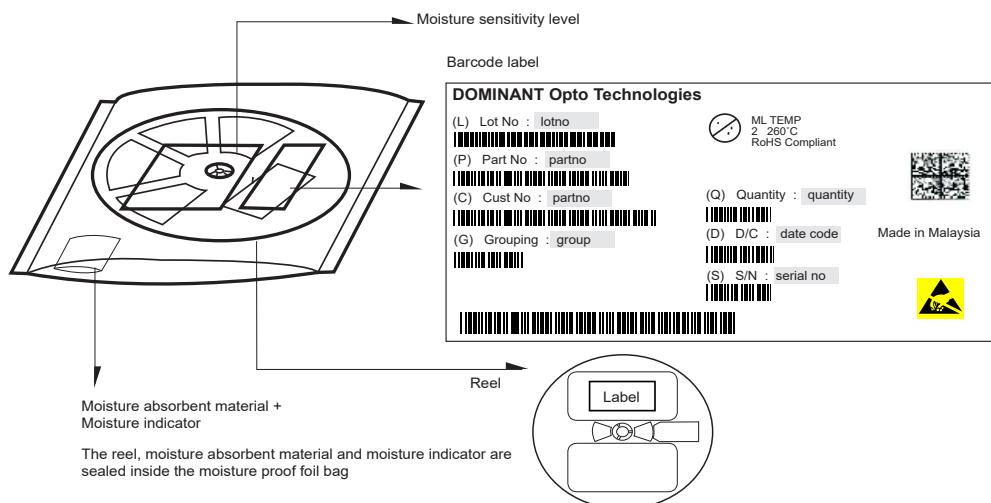


Quantity per bag (pcs)	Average 1pc Power DomiLED (gram)	1 completed bag (gram)
2000	0.034	240 ± 10
8000	0.034	750 ± 10

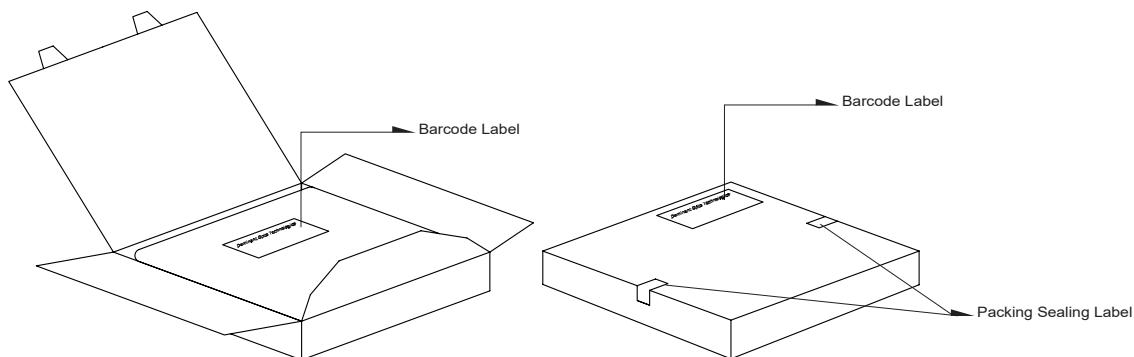

Reel Diameter (mm)	Packing Box Dimensions (mm)
180	210 x 210 x 16
329	345 x 345 x 16

## Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

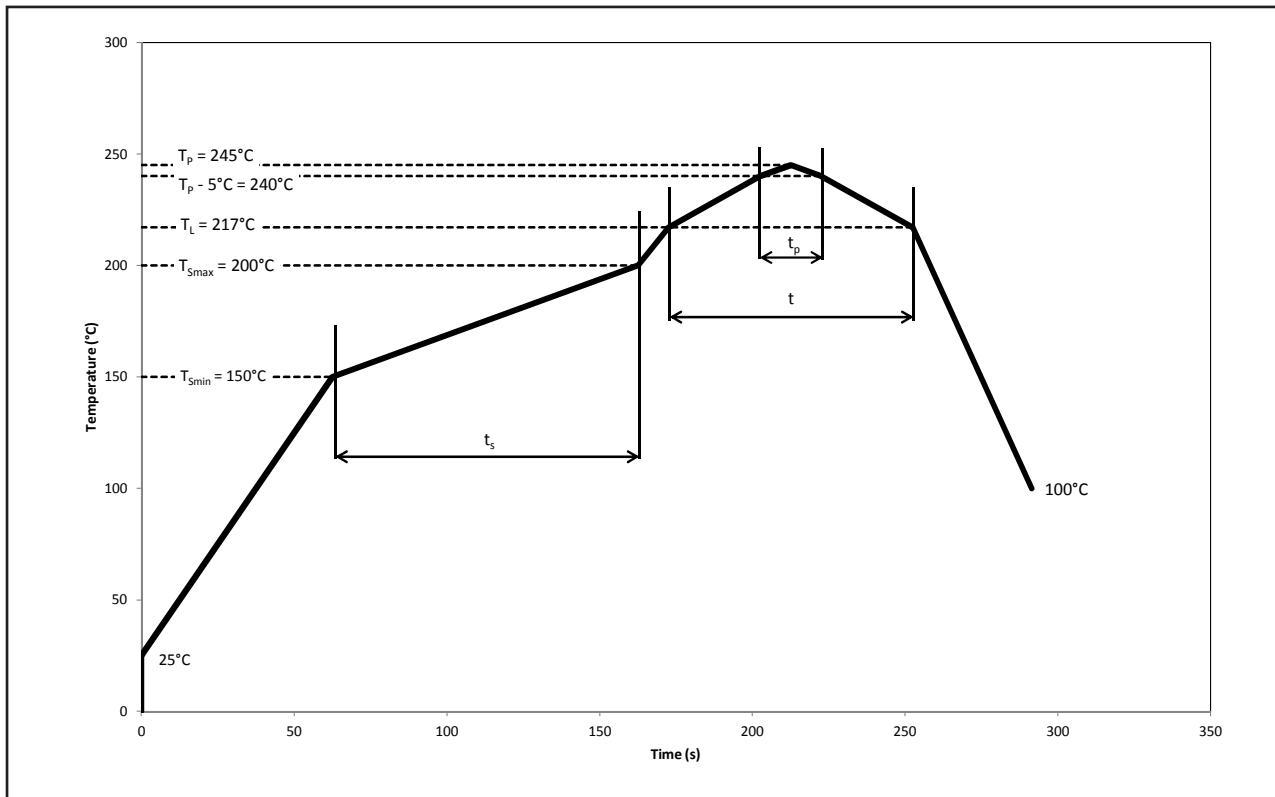

Pb-Free Assembly					
Profile Feature	Symbol	Min.	Recommended	Max.	Unit
Ramp-up rate to preheat $25^\circ\text{C}$ to $T_{Smin}$	-	-	2	3	$^\circ\text{C}/\text{s}$
Time $t_s$ $T_{Smin}$ to $T_{Smax}$	$t_s$	60	100	120	s
Ramp-up rate to peak $T_L$ to $T_p$	-	-	2	3	$^\circ\text{C}/\text{s}$
Liquidous temperature	$T_L$	-	217	-	$^\circ\text{C}$
Time above liquidous temperature	$t$	60	80	150	s
Peak temperature	$T_p$	-	245	260	$^\circ\text{C}$
Time within $5^\circ\text{C}$ of the specified peak temperature $T_p - 5^\circ\text{C}$	$T_p$	10	20	30	s
Ramp-down rate $T_p$ to $100^\circ\text{C}$	-	-	3	6	$^\circ\text{C}/\text{s}$
Time $25^\circ\text{C}$ to $T_p$	-	-	-	480	s

## Appendix

### 1) Brightness:

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (according to GUM with a coverage factor of k=3).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (according to GUM with a coverage factor of k=3).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (according to GUM with a coverage factor of k=3).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (according to GUM with a coverage factor of k=3).

### 2) Color:

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 0.005$  and an expanded uncertainty of  $\pm 0.01$  (accordingly to GUM with a coverage factor of k=3).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of  $\pm 0.5\text{nm}$  and an expanded uncertainty of  $\pm 1\text{nm}$  (accordingly to GUM with a coverage factor of k=3).

### 3) Voltage:

- 3.1 Forward Voltage, Vf is measured when a current pulse of 8 ms(typ) with an internal reproducibility of  $\pm 0.05\text{V}$  and an expanded uncertainty of  $\pm 0.1\text{V}$  (accordingly to GUM with a coverage factor of k=3).

### 4) Typical Values:

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

### 5) Tolerance of Measure

- 5.1 Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimension are specific in mm.

### 6) Characteristic Curve:

- 6.1 In the range where the line of the graph is broken, there could have higher differences for those LEDs within one packing unit.

## Revision History

Page	Subjects	Date of Modification
-	Initial Release	18 Mar 2019
11, 12, 13	Update Packaging Specification Update Recommended Pb-free Soldering Profile	03 Nov 2021

### NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

Dispose of product is in accordance with local, regional, national and international regulations.

## About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

### Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd  
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.  
Tel: +606 283 3566 Fax: +606 283 0566  
E-mail: [sales@dominant-semi.com](mailto:sales@dominant-semi.com)