

Primax

Synonymous with function and performance, enter the Primax, the new era of high intensity illumination in LED. With its high flux output and high luminous intensity, Primax transcends today LED lightings technology and how we perceive it. The small package outline (3.7 x 3.5 x 0.8 mm) and high intensity make it an ideal choice for backlighting, signage, exterior automotive lighting and decorative lighting.



Features:

- > Super high brightness surface mount LED
- > 120° viewing angle.
- > Compact package outline (LxW) of 3.7 x 3.5 mm.
- > Ultra low height profile - 0.8mm.
- > Low thermal resistance.
- > Compatible to IR reflow soldering.
- > Environmental friendly; RoHS compliance.
- > Superior corrosion resistant.
- > Compliance to automotive standard; AEC-Q101.

Applications:

- > Automotive: Exterior application: eg: DRL, Back up Lamp, Position Lamp, Fog Lamp.

Optical Characteristics at Tj=25°C

Part Number	Color	Viewing Angle°	Luminous Flux @ 350mA (lm) <i>Appx. 1.2</i>		
			Min.	Typ.	Max.
● MAW-YZHG-U3W2-1	White	120	99.4	120.0	168.0
● Not for New Design.					


Electrical Characteristics at Tj=25°C

Part Number	Vf @ If = 350 mA <i>Appx. 3.1</i>		
	Min. (V)	Typ. (V)	Max. (V)
MAW-YZHG	2.9	3.2	3.6

Absolute Maximum Ratings

	Maximum Value	Unit
DC forward current	500	mA
Peak pulse current (tp<=10μs, Duty cycle=0.10)	750	mA
Reverse voltage	Not designed for reverse bias	V
ESD threshold (HBM)	4000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +125	°C
Storage temperature	-40 ... +125	°C
Thermal resistance		
- Real Thermal Resistance		
Junction / solder point, R _{th JS real} (typ = 12)	15	K/W
- Electrical Thermal Resistance		
Junction / solder point, R _{th JS el} (typ = 8)	10	K/W

MAW-YZHG, Color Grouping *Appx. 2.1*

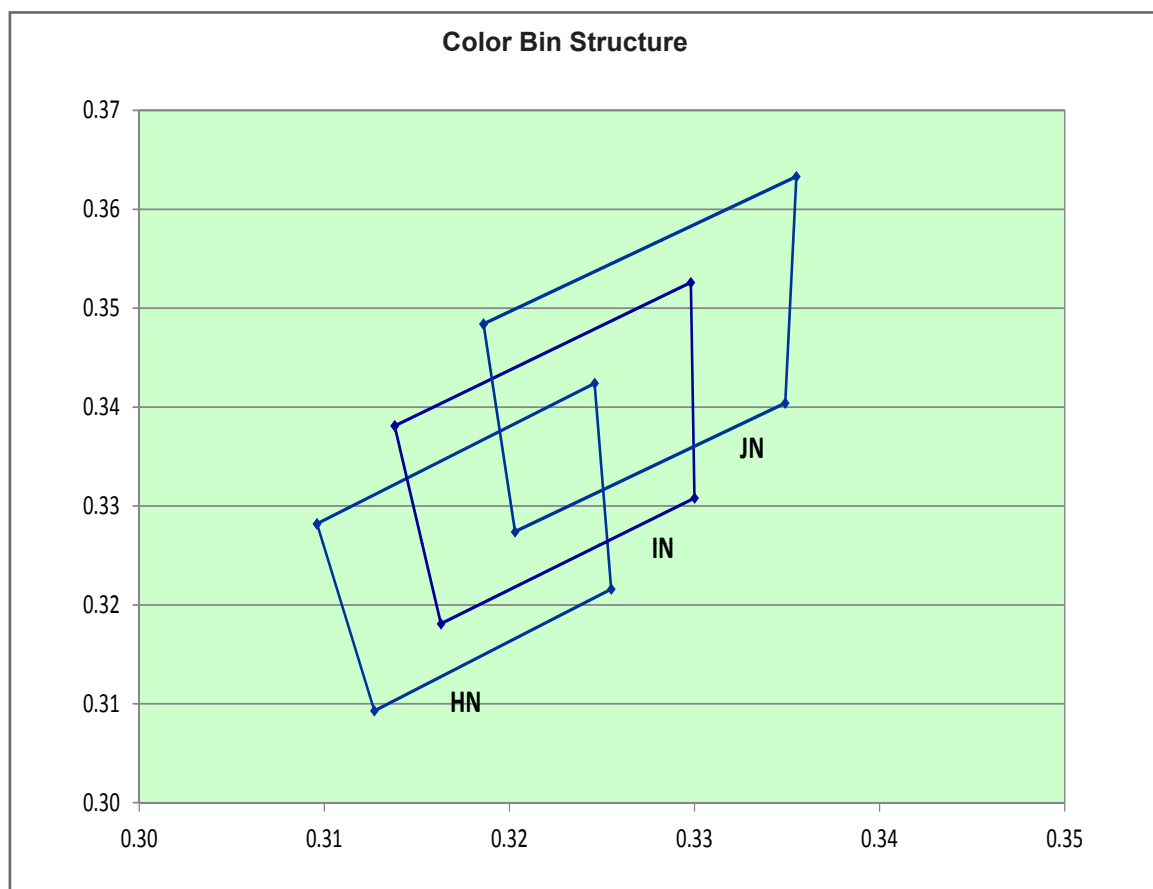

Bin		1	2	3	4
HN	Cx	0.3096	0.3127	0.3255	0.3246
	Cy	0.3282	0.3093	0.3216	0.3424
IN	Cx	0.3138	0.3163	0.3300	0.3298
	Cy	0.3381	0.3181	0.3308	0.3526
JN	Cx	0.3186	0.3203	0.3349	0.3355
	Cy	0.3484	0.3274	0.3404	0.3633

Luminous Intensity Group at Tj=25°C

Brightness Group	Luminous Flux (lm) <i>Appx. 1.2</i>
U3	99.4 ... 113.6
V2	113.6 ... 129.2
V3	129.2 ... 147.7
W2	147.7 ... 168.0


Vf Binning (Optional)

Vf Bin @ 350mA	Forward Voltage (V) <i>Appx. 3.1</i>
V0	2.90 ... 3.20
V1	3.20 ... 3.50
V2	3.50 ... 3.80

Please consult sales and marketing for special part number to incorporate Vf binning.


Relative Luminous Flux Vs Forward Current

$$\Phi_v/\Phi_v(350\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$$

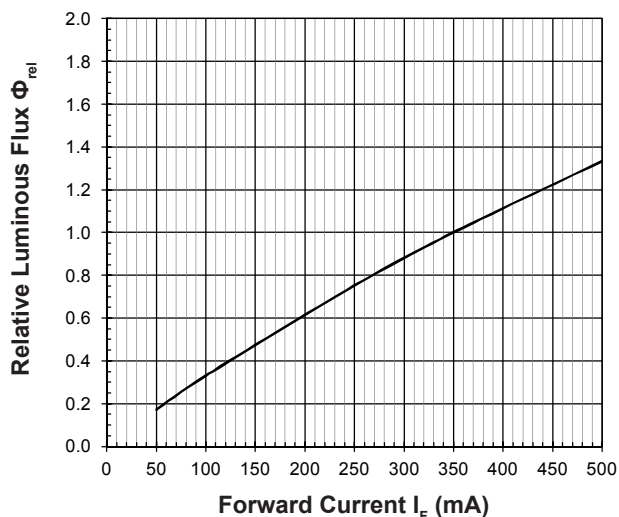


Forward Current Vs Forward Voltage

$$I_F = f(V_F); T_j = 25^\circ\text{C}$$

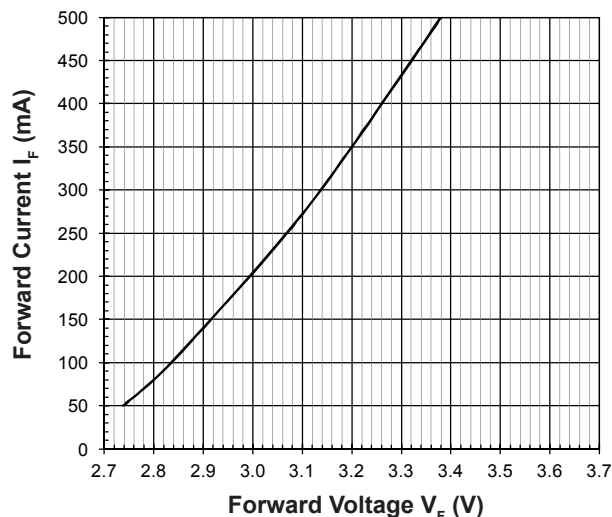


Maximum Current Vs Temperature

$$I_F = f(T)$$

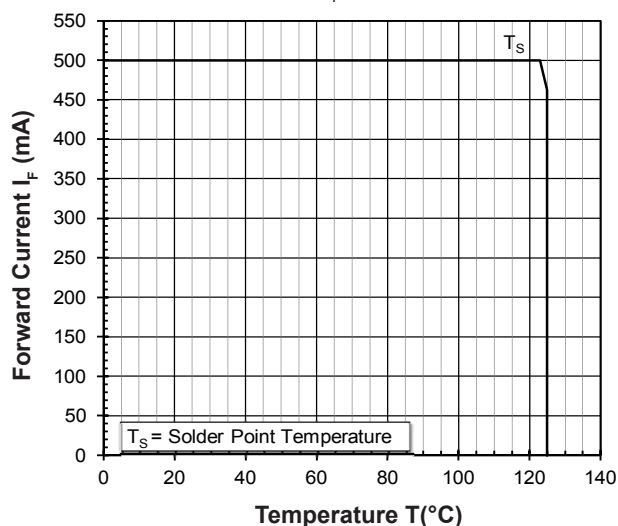


Relative Spectral Emission

$$\Phi_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 350\text{mA}$$

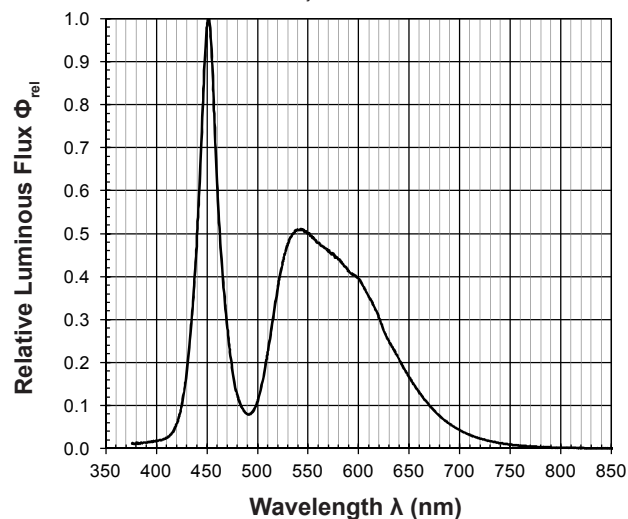

Chromaticity Coordinate Shift Vs Forward Current

$$\Delta Cx, \Delta Cy = f(I_F); T_j = 25^\circ\text{C}$$

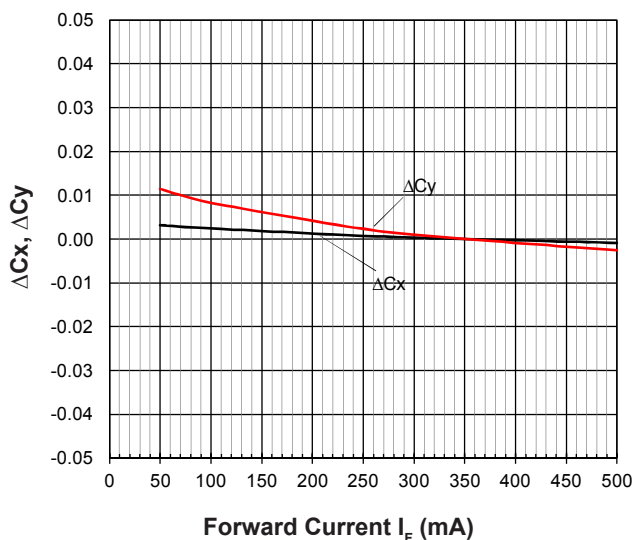


Allowable Forward Current Vs Duty Ratio

$$(T_j = 25^\circ\text{C}; t_p \leq 10\mu\text{s})$$




Radiation Pattern

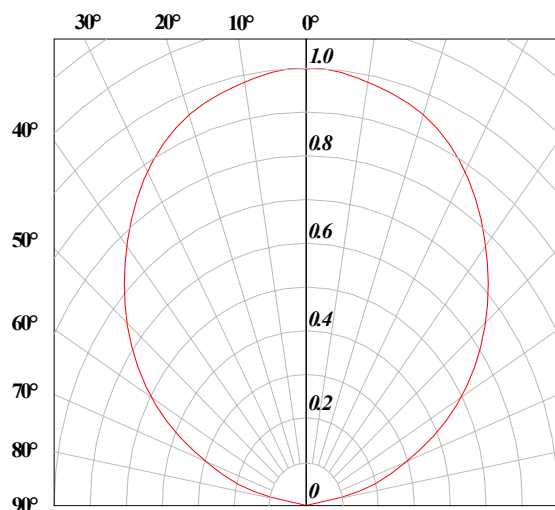


Forward Voltage Vs Junction Temperature

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 350\text{mA}$$

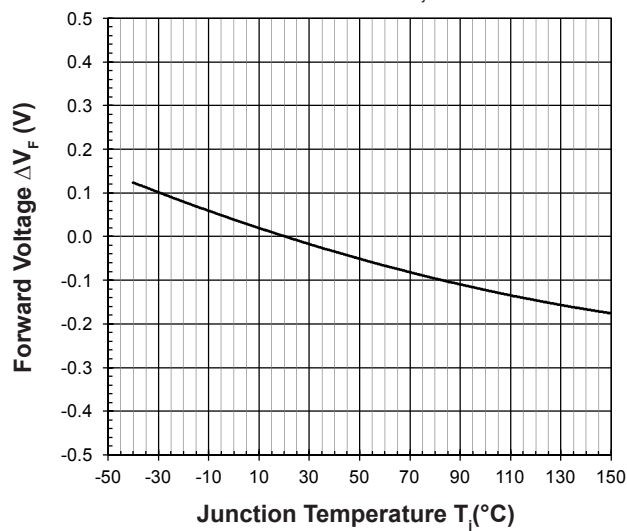


Relative Luminous Flux Vs Junction Temperature

$$\Phi_V/\Phi_V(25^\circ\text{C}) = f(T_j); I_F = 350\text{mA}$$

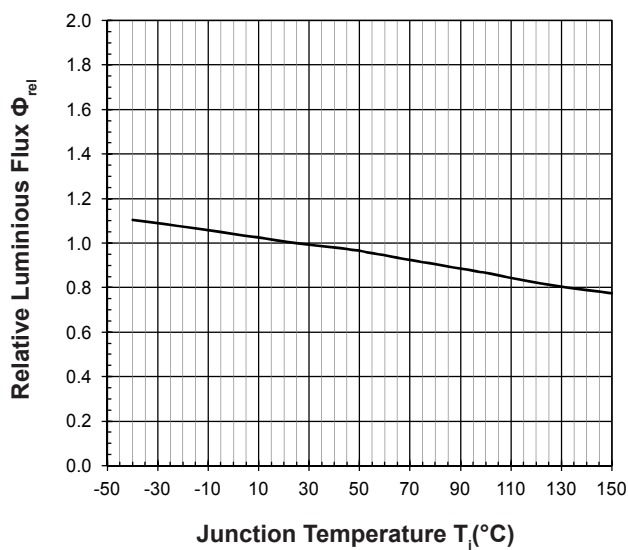


Chromaticity Coordinate Shift Vs Junction Temperature

$$\Delta C_x, \Delta C_y = f(T_j); I_F = 350\text{mA}$$

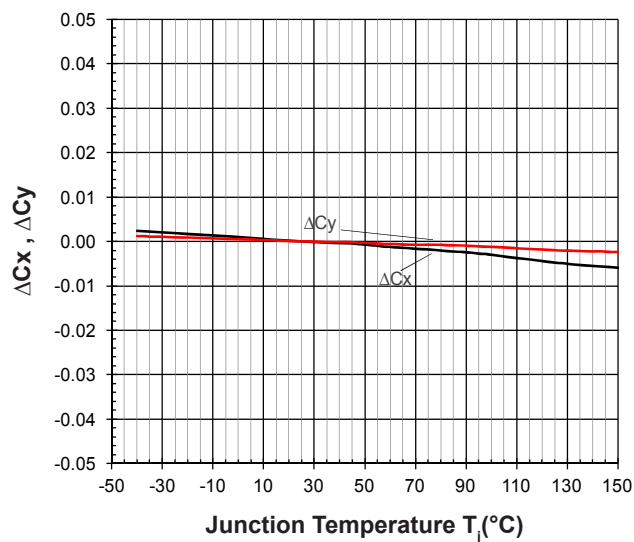

PrimaxPlus • InGaN : MAW-YZHG Package Outlines

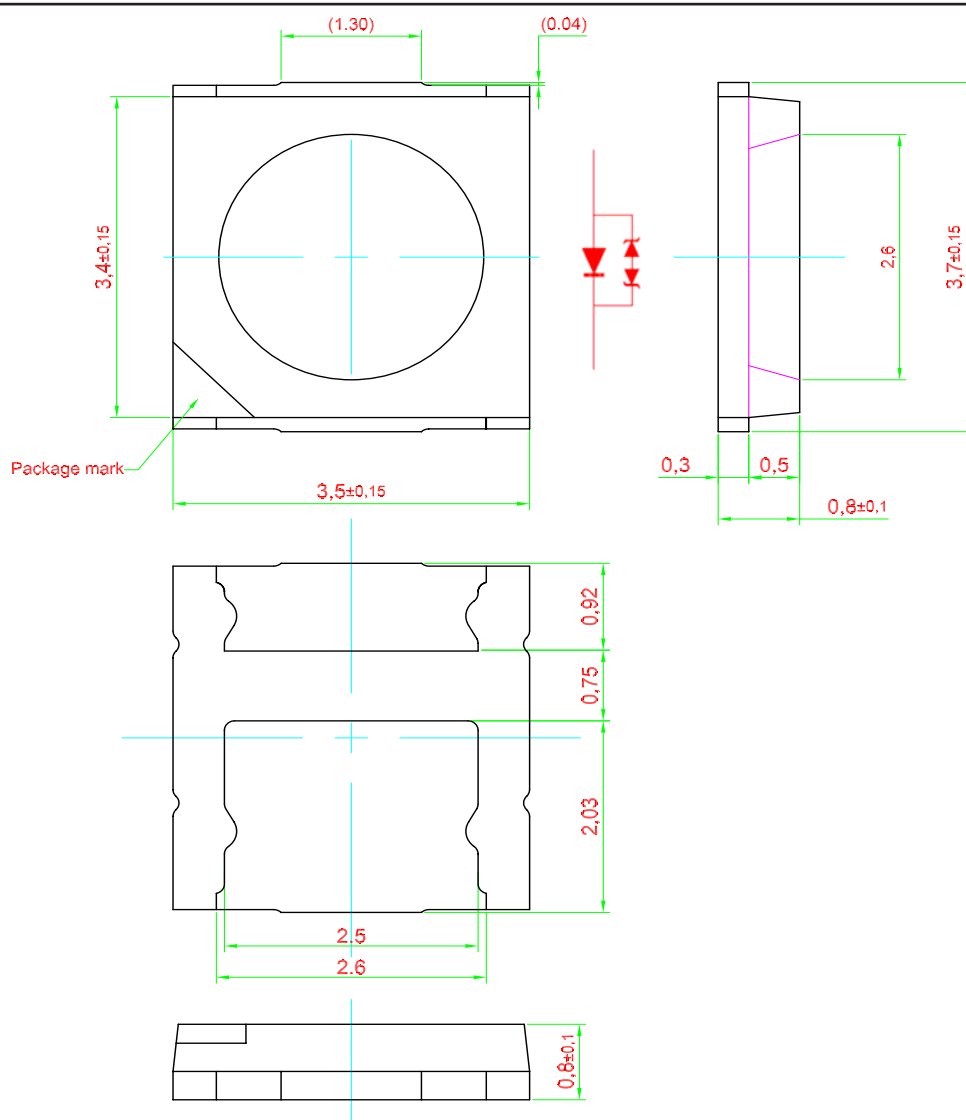


Notes:
 Primary thermal path is through Cathode lead of LED package.
 General tolerance: +/- 0.1mm.


Material

Material	
Lead-frame	Cu Alloy With Au Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone Resin
Soldering Leads	Au Plating



Recommended Solder Pad

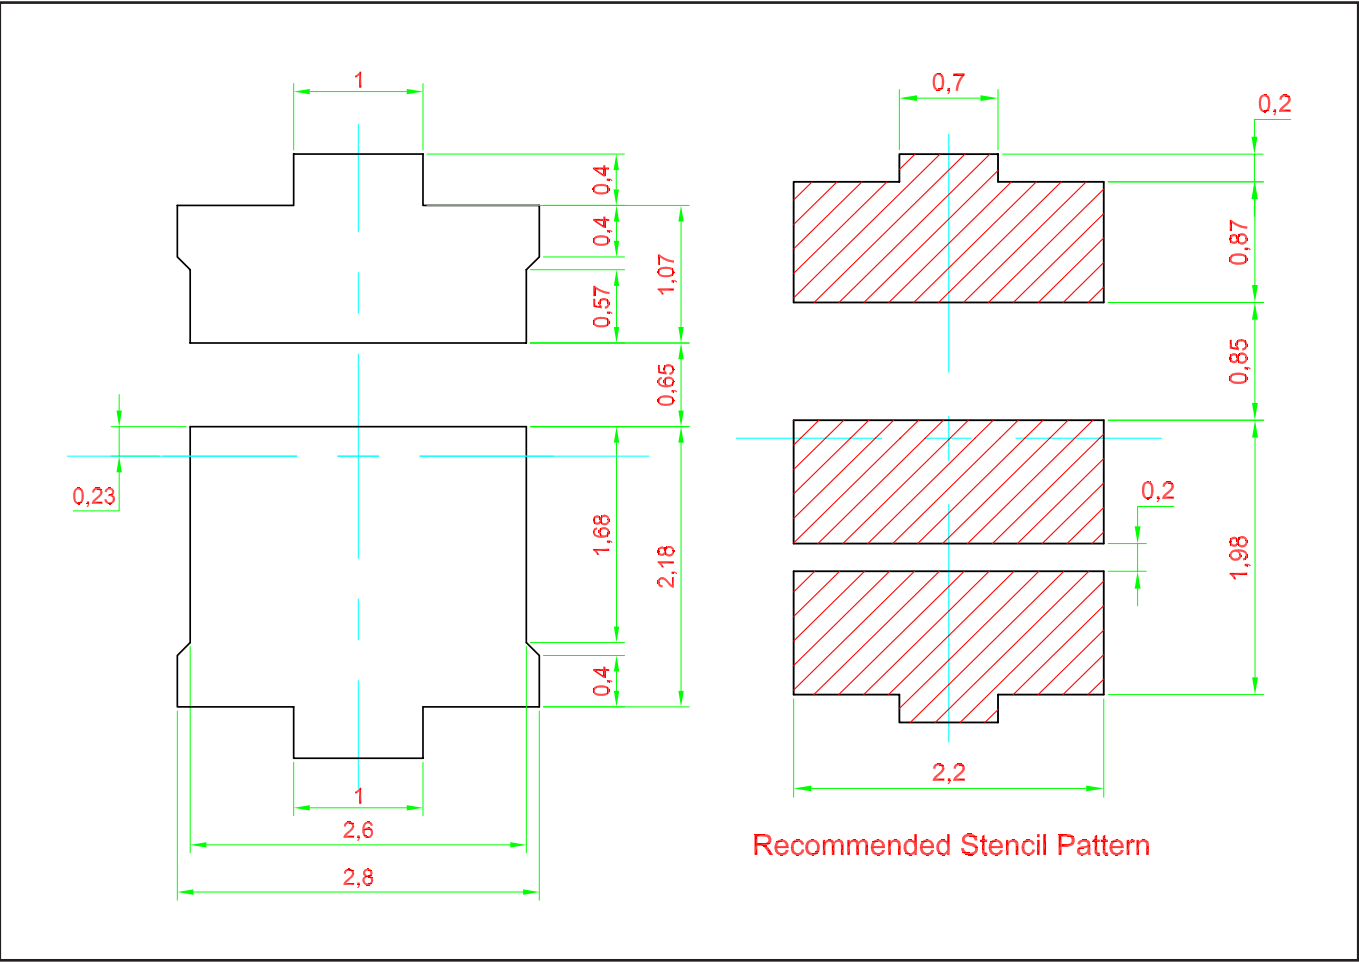

Taping and orientation

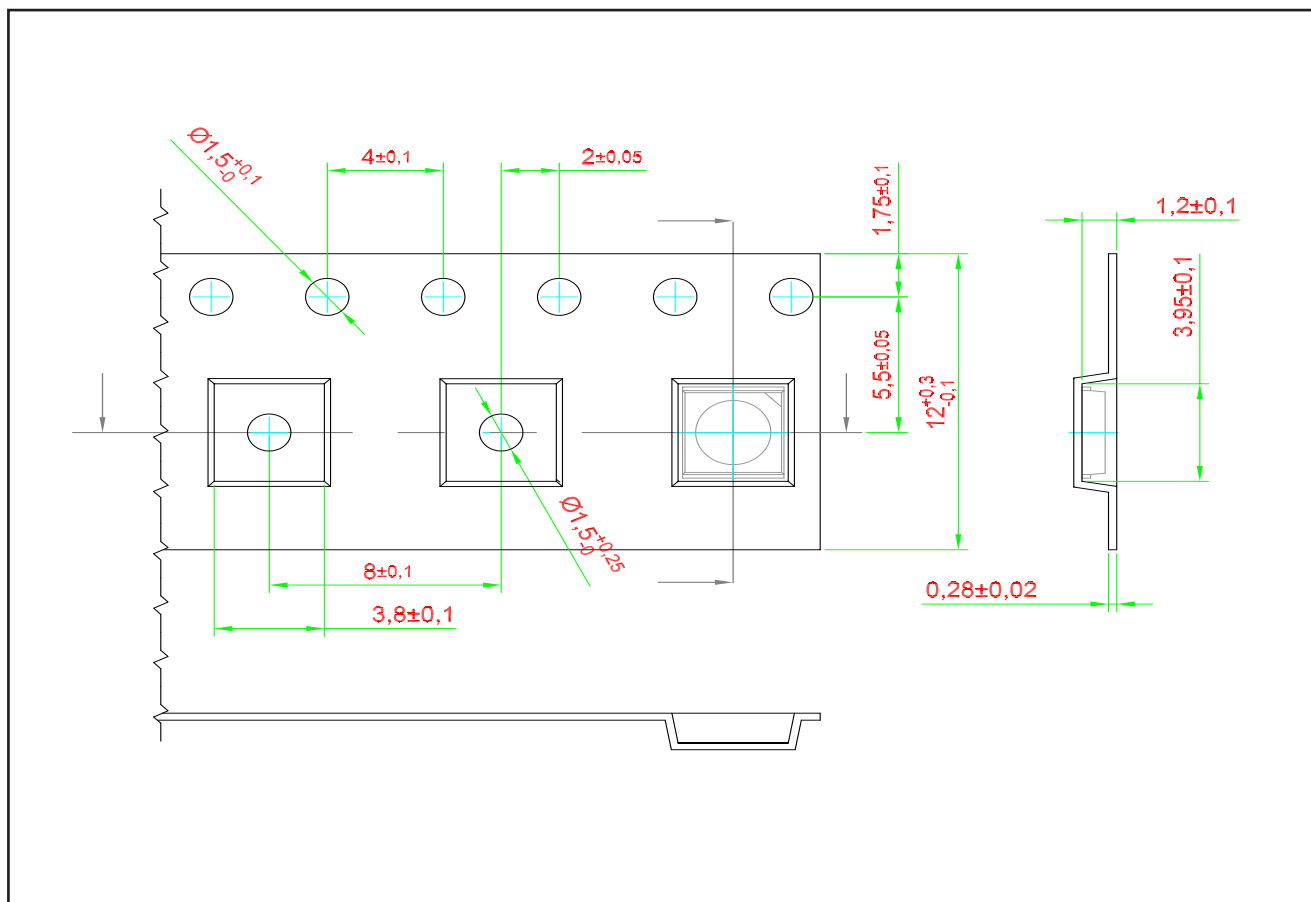

Packaging Specification

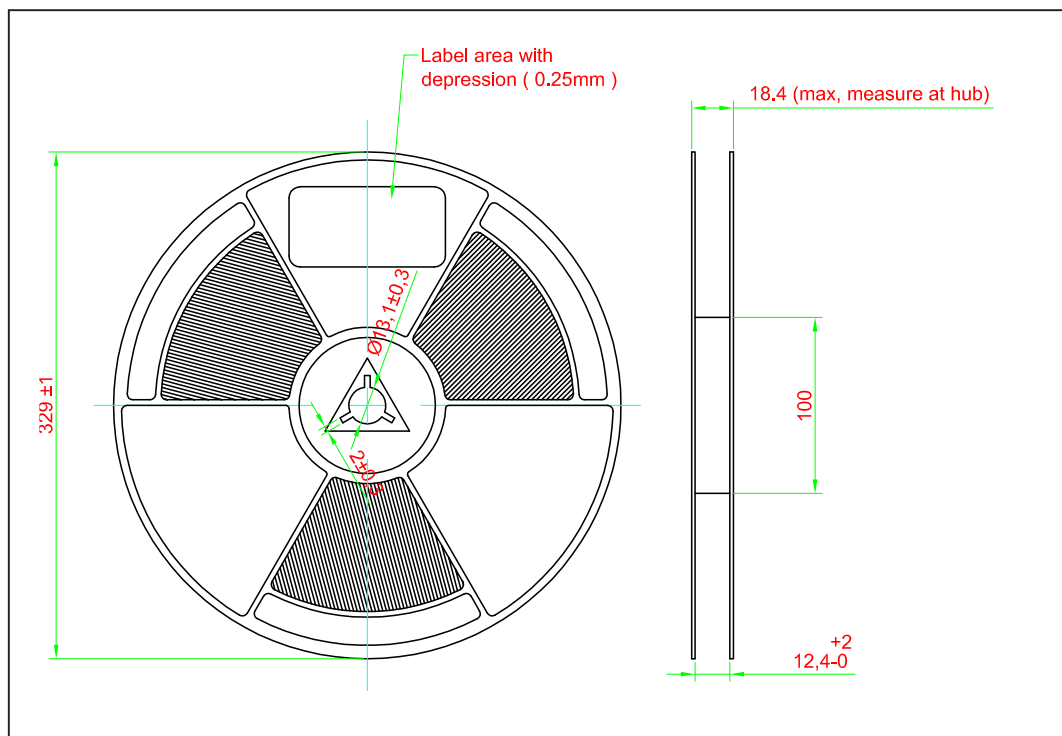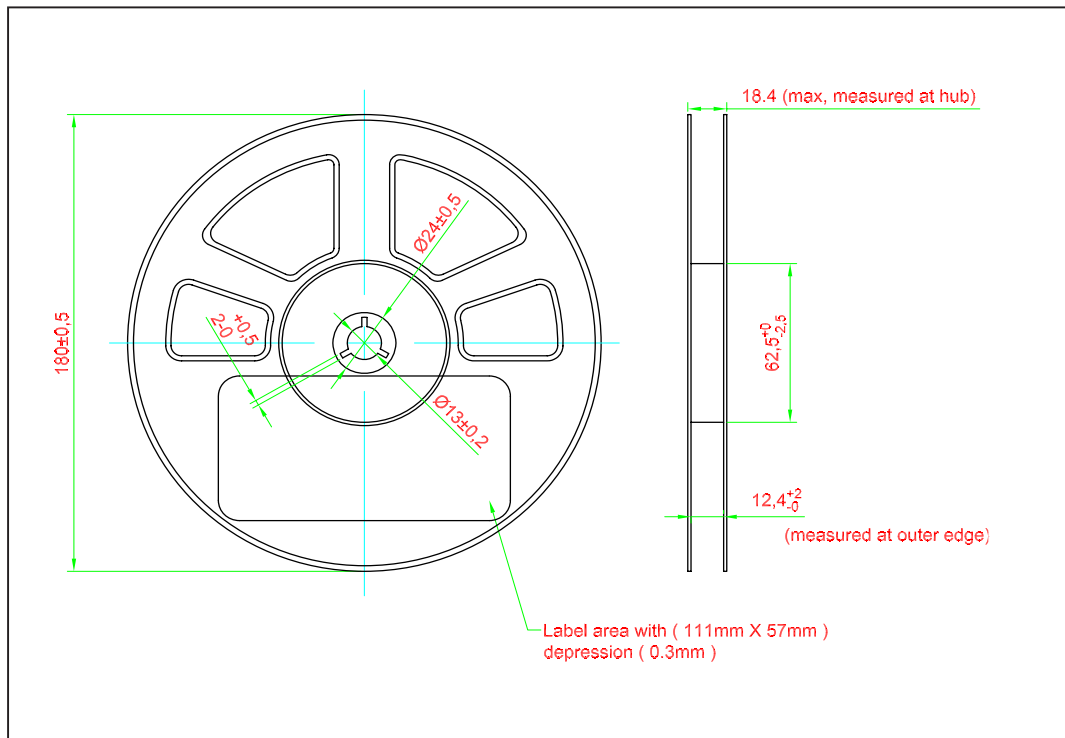


	Reel Diameter (mm)	Quantity (pcs)	*Ordering Number
Standard Packing	180	1500	MAW-YZHG-xxx-x
Optional Packing	329	5000	MAW-YZHG-xxx-x-5


Notes:

* For ordering purpose only. Please consult sales and marketing for details.

Packaging Specification

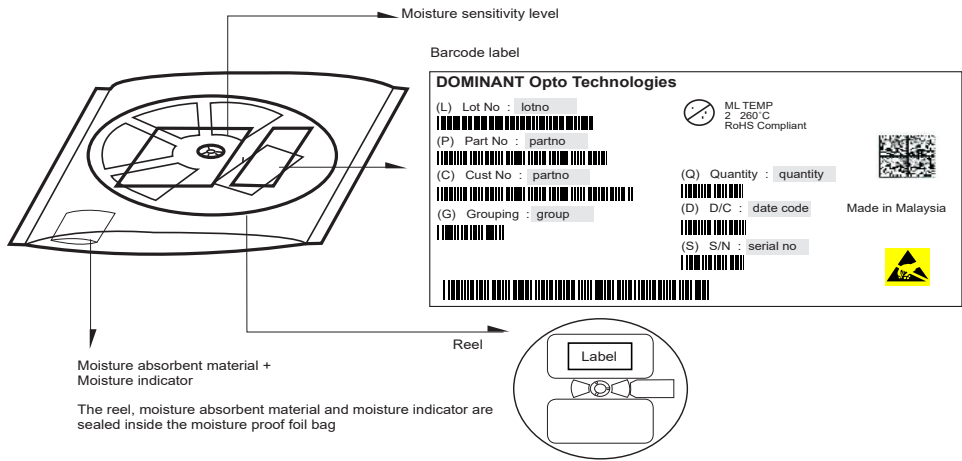


Quantity per bag (pcs)	Average 1pc PrimaxPlus (g)	1 completed bag (g)
1500	0.034	245 ± 10
5000	0.034	1150 ± 10

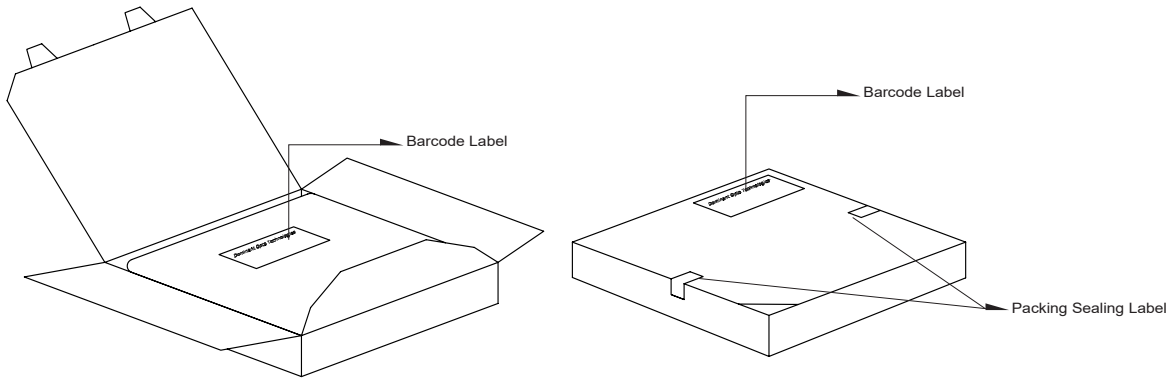

Reel Diameter (mm)	Packing Box Dimensions (mm)
180	210 x 210 x 20
329	345 x 345 x 20

Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

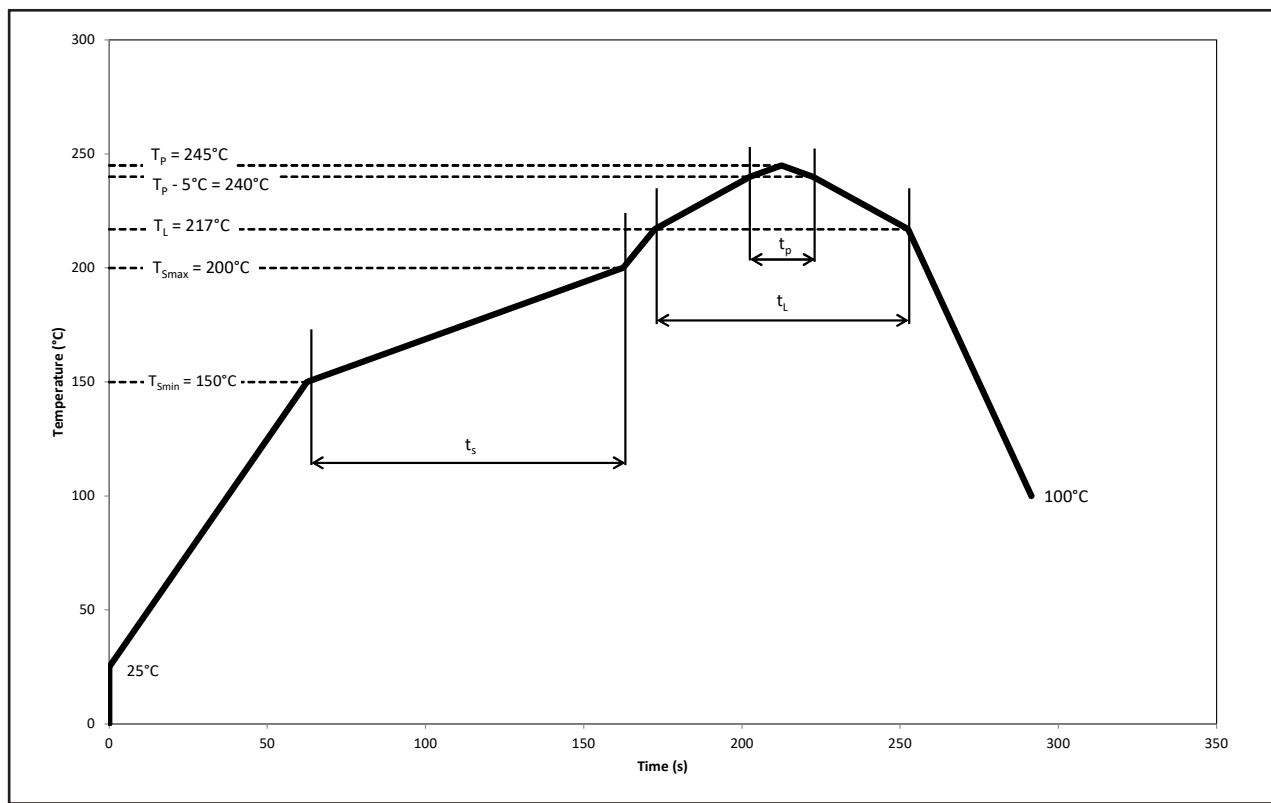

Profile Feature	Symbol	Pb-Free Assembly			Unit
		Min.	Recommended	Max.	
Ramp-up rate to preheat 25°C to T_{smin}	-	-	2	3	°C/s
Time t_s T_{smin} to T_{smax}	t_s	60	100	120	s
Ramp-up rate to peak T_L to T_P	-	-	2	3	°C/s
Liquidous temperature	T_L	-	217	-	°C
Time above liquidous temperature	t_L	60	80	150	s
Peak temperature	T_P	-	245	260	°C
Time within 5°C of the specified peak temperature $T_P - 5^\circ\text{C}$	t_p	10	20	30	s
Ramp-down rate T_P to 100°C	-	-	3	6	°C/s
Time 25°C to T_P	-	-	-	480	s

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8 \%$ and an expanded uncertainty of $\pm 11 \%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specific in mm.

Revision History

Page	Subjects	Date of Modification
-	Initial Release	26 Sep 2014
5	Add Vf Binning	26 Jan 2015
1, 6, 8, 12	Update Features Update Graph: Relative Flux Vs Forward Current Forward Current Vs Forward Voltage Relative Intensity Vs Wavelength Chromaticity Coordinate Shift Add Notes in Package Outline Update Packaging Specification	13 Jan 2016
1, 2, 5, 6, 7, 13	Update Applications Update Thermal Resistance Update Graph Typo Error on Material Add Appendix	13 Oct 2016
1, 7, 8	Update Features Update on Package Outline Update Recommended Solder Pad	17 Mar 2017
2, 7	Typo Error on Peak Pulse Current Update Package Outline	17 May 2017
10, 11, 12	Update Packaging Specification Update Recommended Pb-free Soldering Profile	11 Mar 2022
2	Not for New Design: MAW-YZHG-U3W2-1	11 Nov 2022
10, 11	Update Quantity per Reel: 1000pcs to 1500pcs	26 Oct 2023

NOTE

All the information contained in this document is considered to be reliable at the time of publishing. However, DOMINANT Opto Technologies does not assume any liability arising out of the application or use of any product described herein.

DOMINANT Opto Technologies reserves the right to make changes to any products in order to improve reliability, function or design.

DOMINANT Opto Technologies products are not authorized for use as critical components in life support devices or systems without the express written approval from the Managing Director of DOMINANT Opto Technologies.

Dispose of product is in accordance with local, regional, national and international regulations.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia.
Tel: +606 283 3566 Fax: +606 283 0566
E-mail: sales@dominant-semi.com