


Primax

Synonymous with function and performance, enter the Primax, the new era of high intensity illumination in LED. With its high flux output and high luminous intensity, Primax transcends today LED lightings technology and how we perceive it. The small package outline and high intensity make it an ideal choice for backlighting, signage, exterior automotive lighting and decorative lighting.



Features:

- > Super high brightness surface mount LED
- > 120° viewing angle.
- > Compact package outline (LxW) of 3.7 x 3.5 mm.
- > Ultra low height profile - 0.8mm.
- > Low thermal resistance.
- > Compatible to IR reflow soldering.
- > Superior corrosion resistant
- > Environmental friendly; RoHS compliance.
- > Qualified based on AEC-Q102 Standard.



Applications:

- > Automotive: Driver Monitoring, Seat Occupancy Detection.
- > Infrared Illumination for cameras.
- > Machine Vision Systems.
- > Surveillance Systems.
- > Eye Tracking Systems.

Optical Characteristics at Tj=25°C

Part Number	Peak Wavelength	Viewing Angle°	Radiant Intensity <small>Appx. 1.3</small> IF = 1000mA Ie(mW/sr)		Total Radiant Flux (mW)
			Min.	Max.	Typ.
MA85-TZHG-CB-1	850nm	120	300.0	500.0	1150.0

Electrical Characteristics at Tj=25°C

Part Number	Vf @ If = 1000 mA <small>Appx. 3.1</small>		
	Min. (V)	Typ. (V)	Max. (V)
MA85-TZHG	2.80	3.20	3.60

Absolute Maximum Ratings


	Maximum Value	Unit
DC forward current	1000	mA
Peak Pulse Current (T _s =55°C, tp<=100µs, Duty cycle=0.03)	5	A
Reverse Voltage	Not designed for reverse bias	V
ESD threshold (HBM)	8000	V
LED junction temperature	150	°C
Operating temperature	-40 ... +125	°C
Storage temperature	-40 ... +125	°C
Thermal resistance		
- Real Thermal Resistance		
Junction / solder point, R _{th JS real} (typ = 3.6)	5	K/W
- Electrical Thermal Resistance		
Junction / solder point, R _{th JS el} (typ = 2.5)	3.3	K/W

Radiant Intensity at Tj=25°C

Brightness Group	Radiant Intensity
CB	300.0 ... 500.0


Radiant Intensity Vs Forward Current

$I_e/I_e(1000\text{mA}) = f(I_F); T_j = 25^\circ\text{C}$

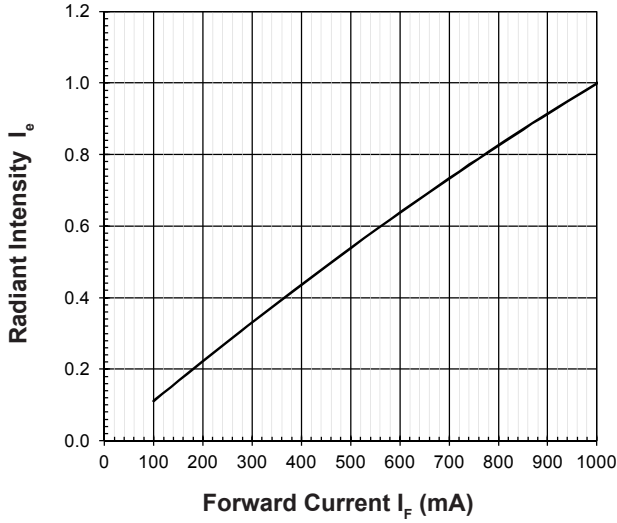


Forward Current Vs Forward Voltage

$I_F = f(V_F); T_j = 25^\circ\text{C}$

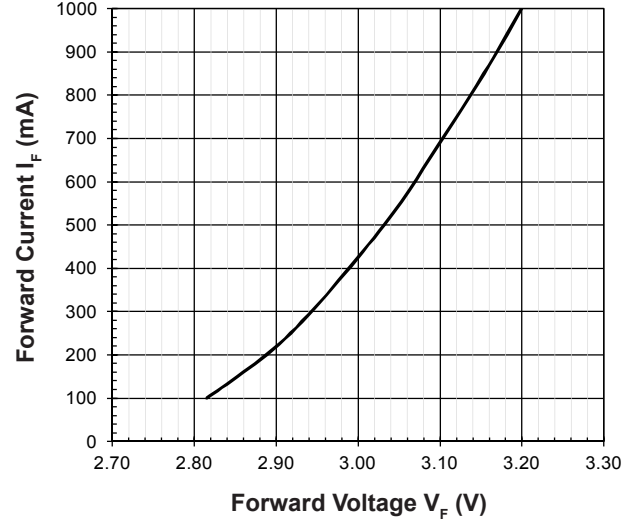


Maximum Current Vs Temperature

$I_F = f(T)$

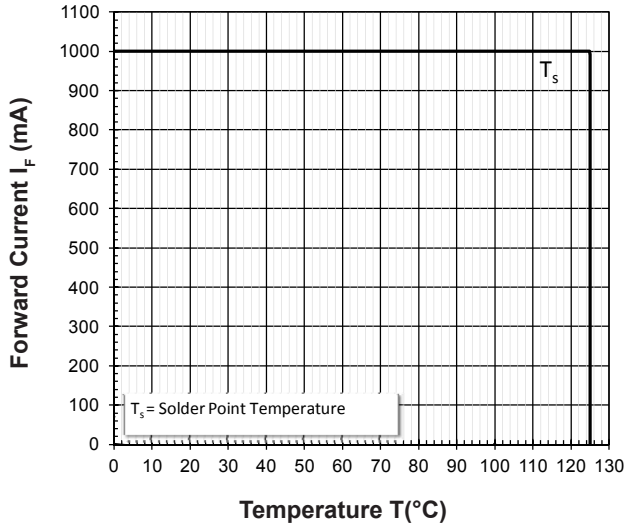


Relative Spectral Emission

$I_{rel} = f(\lambda); T_j = 25^\circ\text{C}; I_F = 1000\text{mA}$

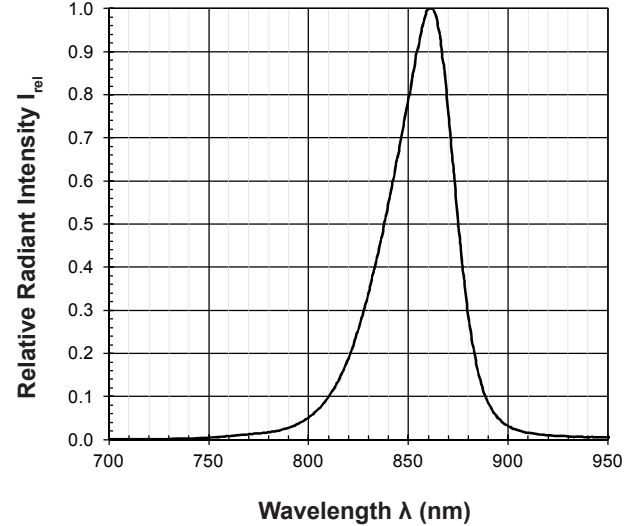

Radiation Pattern

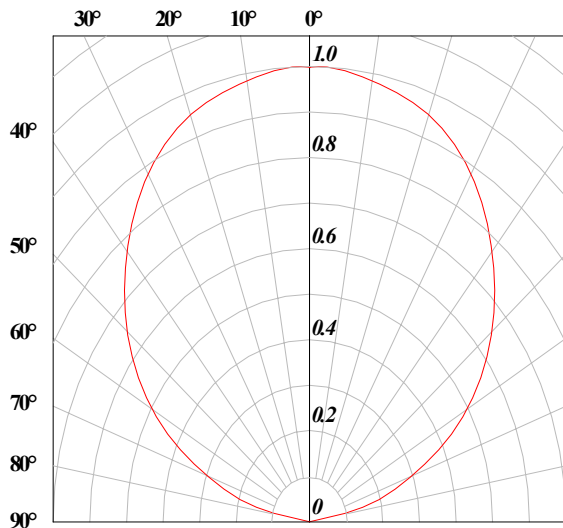


Allowable Forward Current Vs Duty Ratio

$(T_s = 55^\circ\text{C}; t_p \leq 100\mu\text{s})$




Forward Voltage Vs Junction Temperature

$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000\text{mA}$

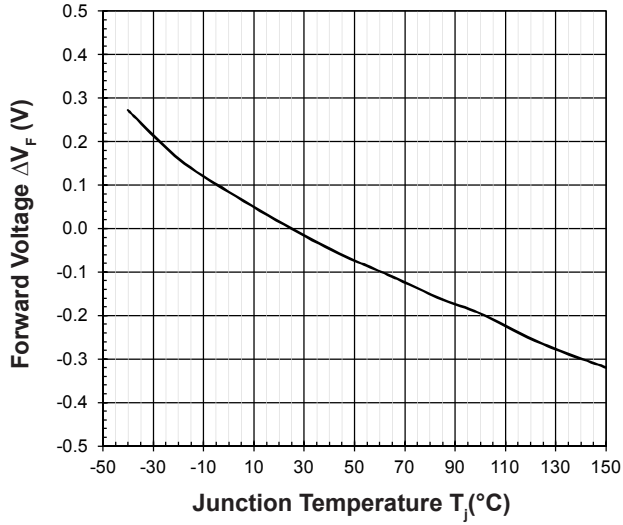


Relative Radiant Intensity Vs Junction Temperature

$I_e/I_e(25^\circ\text{C}) = f(T_j); I_F = 1000\text{mA}$

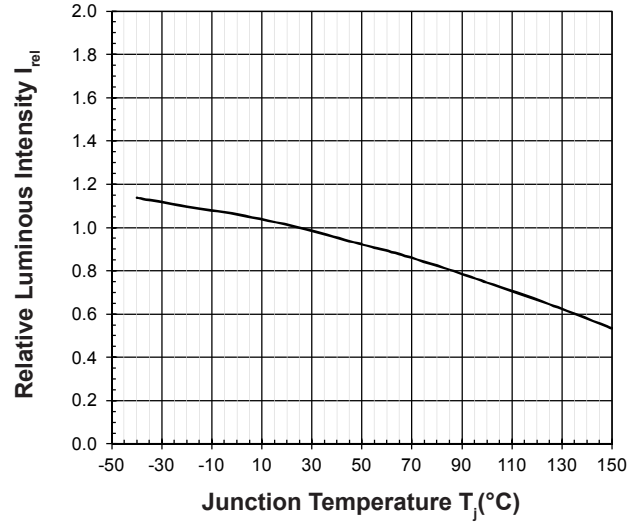


Wavelength Vs Junction Temperature

$\Delta \lambda_{dom} = \lambda_{dom} - \lambda_{dom}(25^\circ\text{C}) = f(T_j); I_F = 1000\text{mA}$

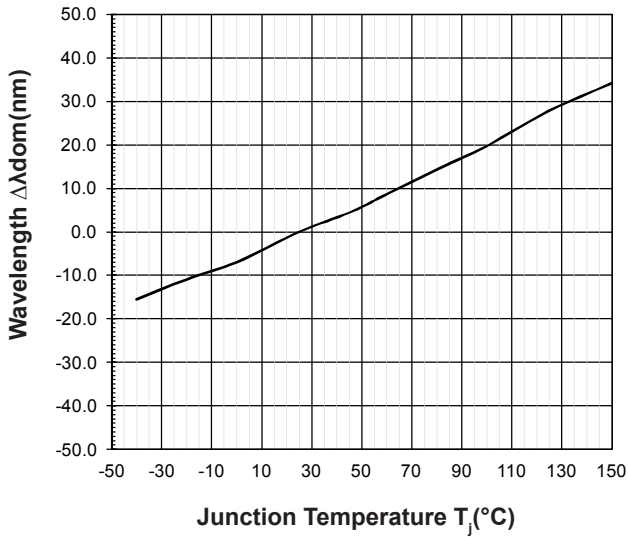


PrimaxPlus • Infra Red: MA85-TZHG Package Outlines

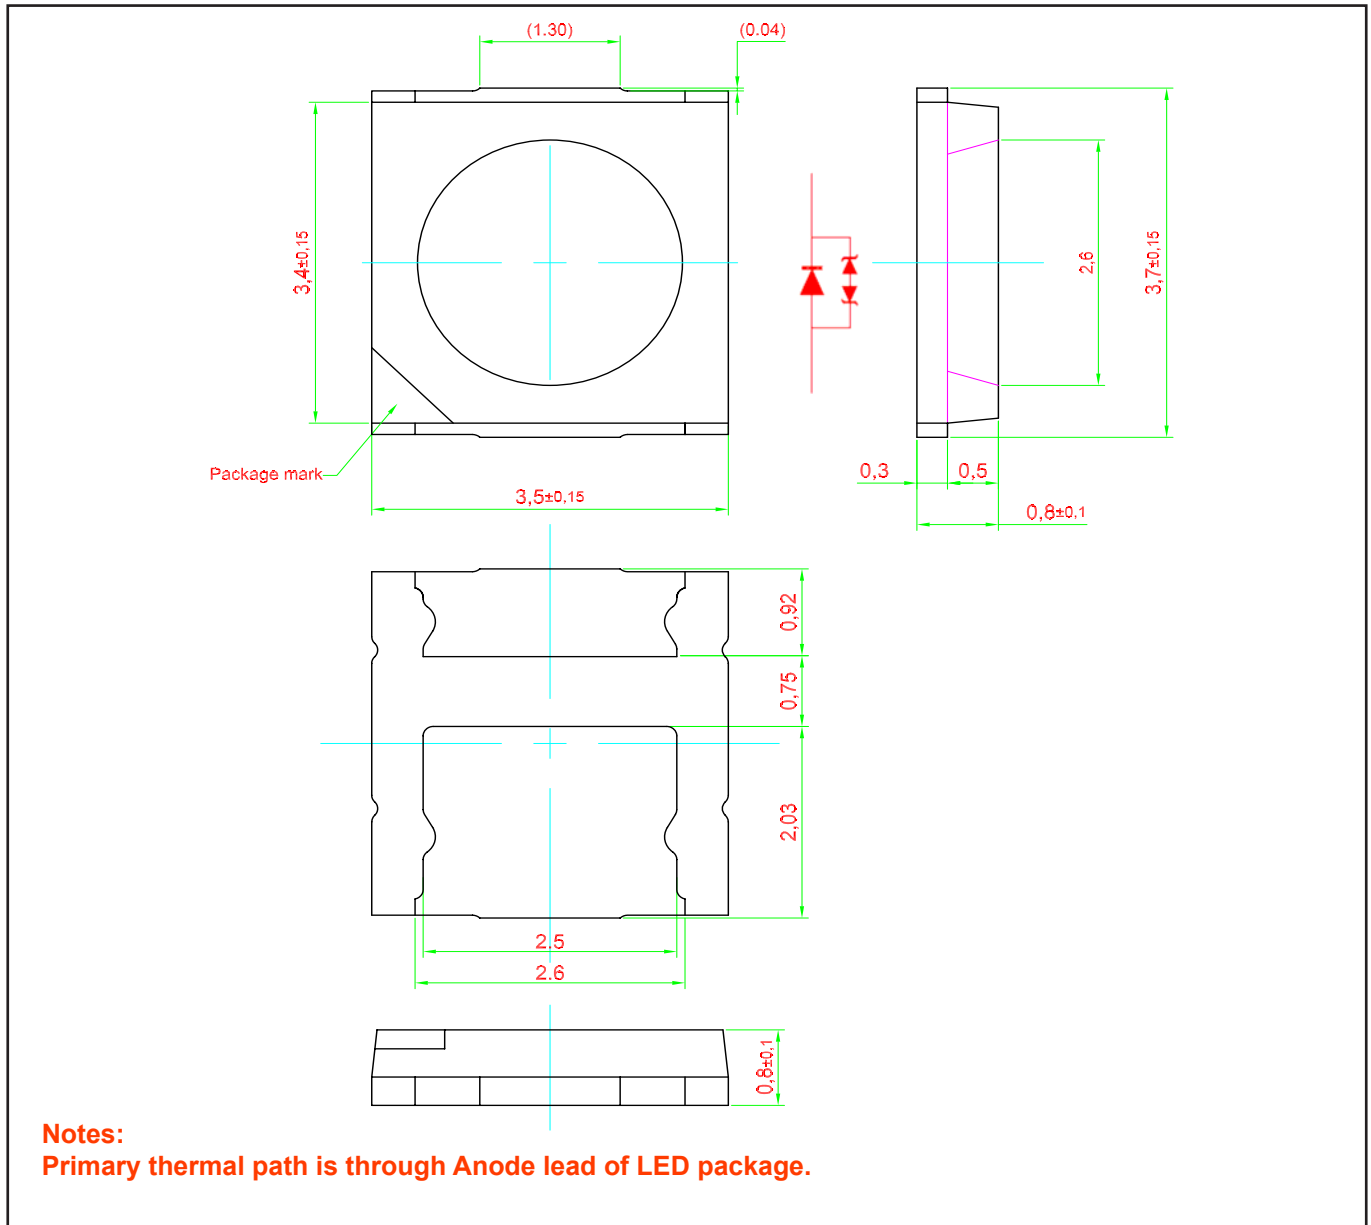


Material

Material	
Lead-frame	Cu Alloy With Au Plating
Package	High Temperature Resistant Plastic
Encapsulant	Silicone Resin
Soldering Leads	Au Plating



Recommended Solder Pad

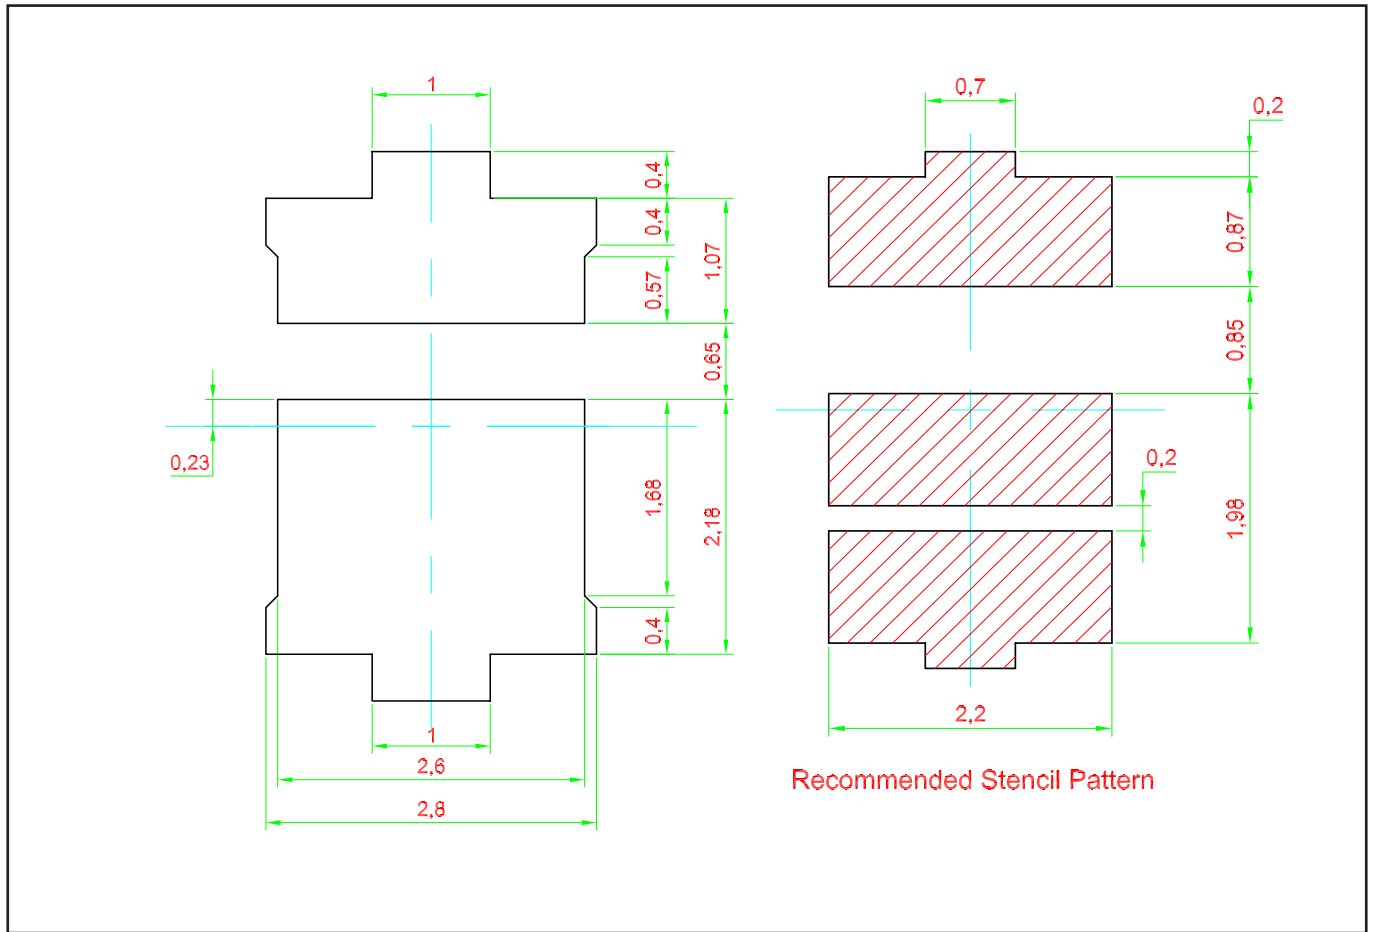

Taping and orientation

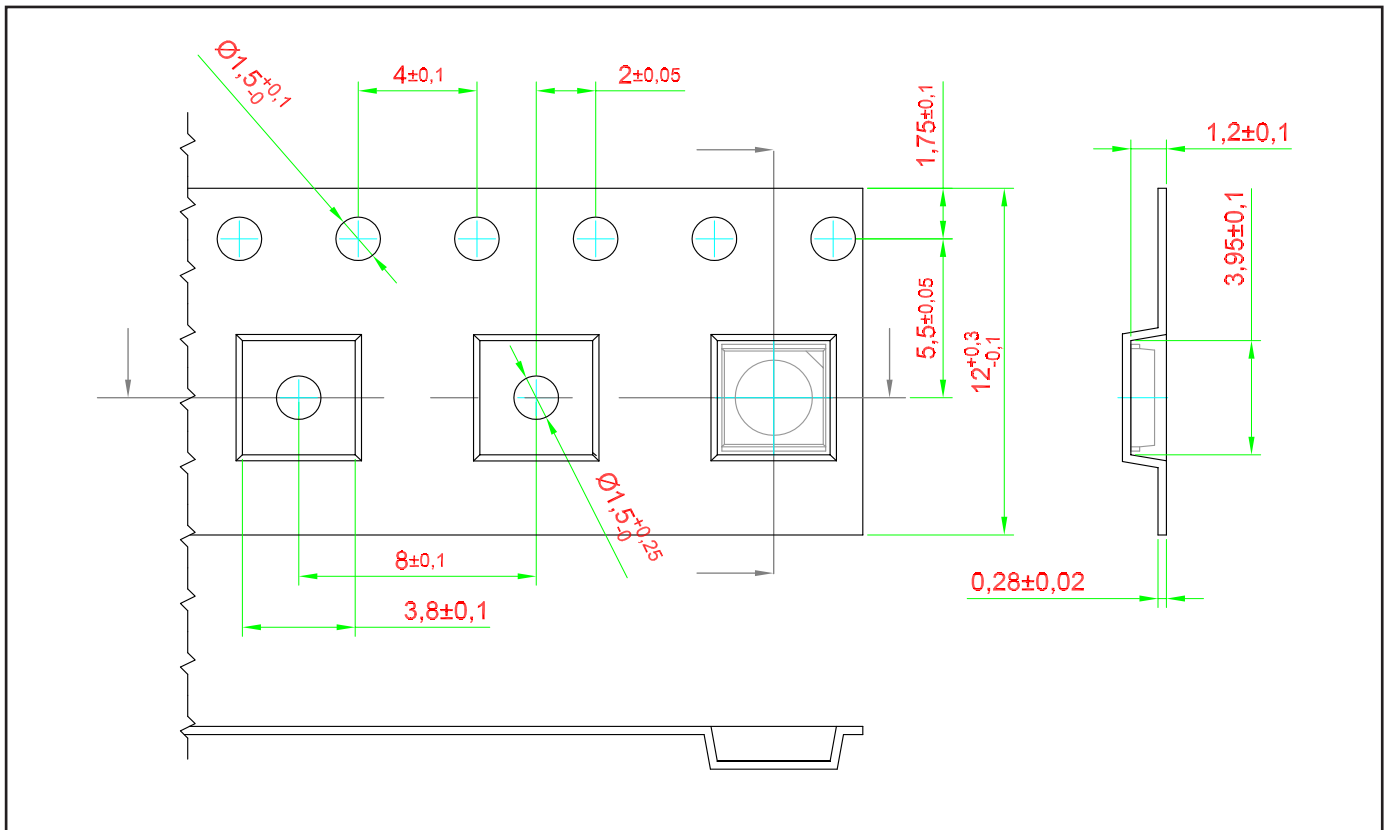

Packaging Specification

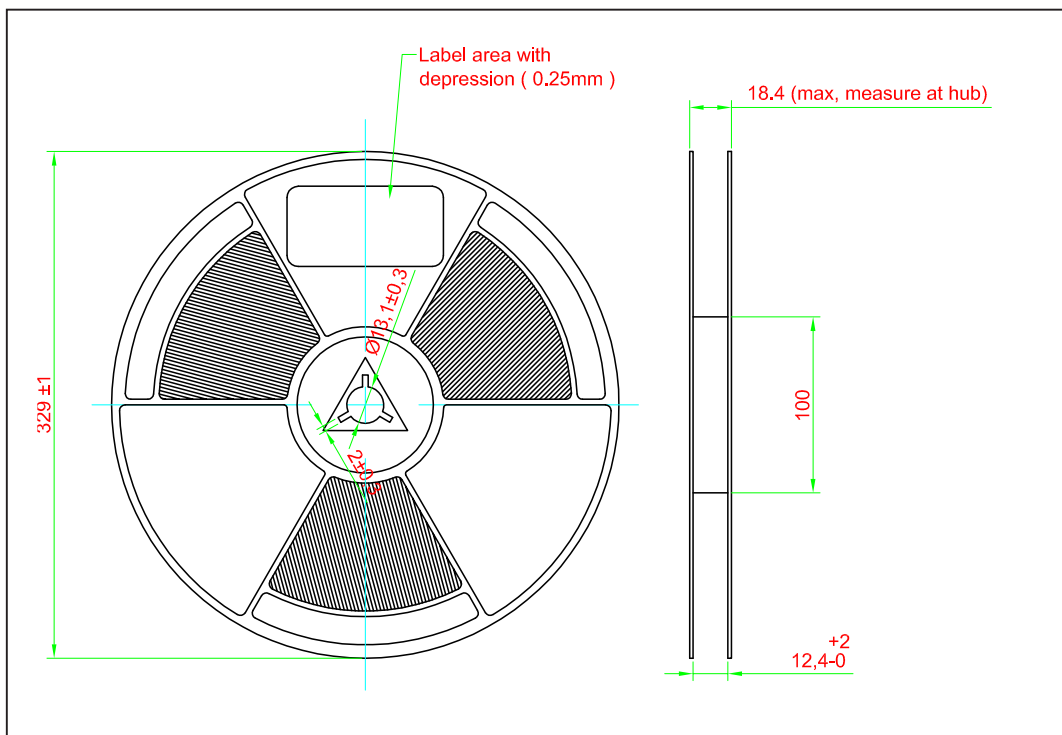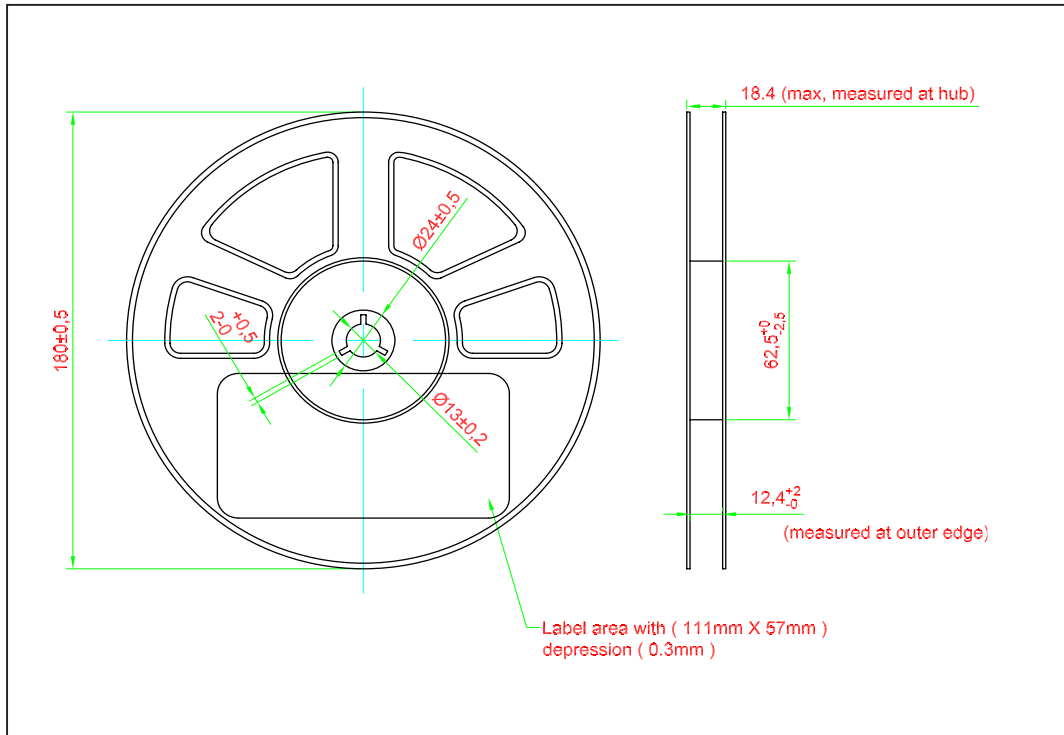


	Reel Diameter (mm)	Quantity (pcs)	*Ordering Number
Standard Packing	180	1500	MA85-TZHG-xxx-x
Optional Packing	329	5000	MA85-TZHG-xxx-x-5


Notes:

* For ordering purpose only. Please consult sales and marketing for details.

Packaging Specification

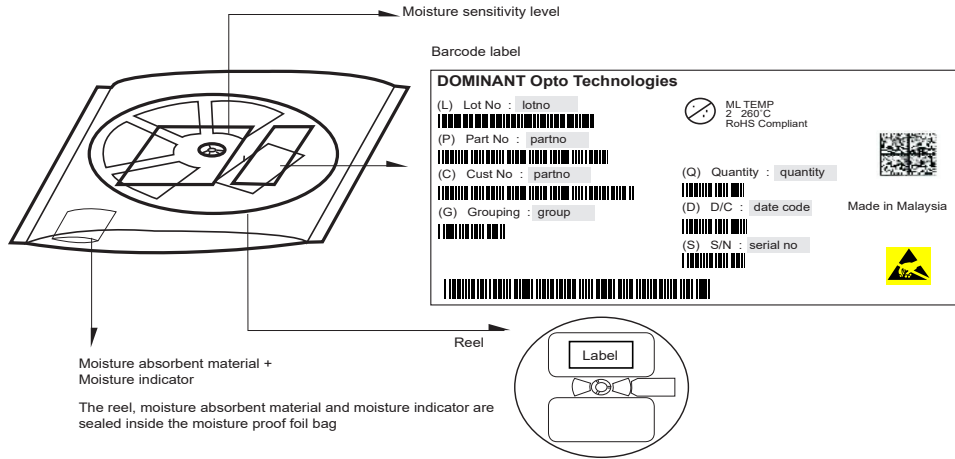


Quantity per bag (pcs)	Average 1pc PrimaxPlus (g)	1 completed bag (g)
1500	0.034	245 ± 10
5000	0.034	1150 ± 10

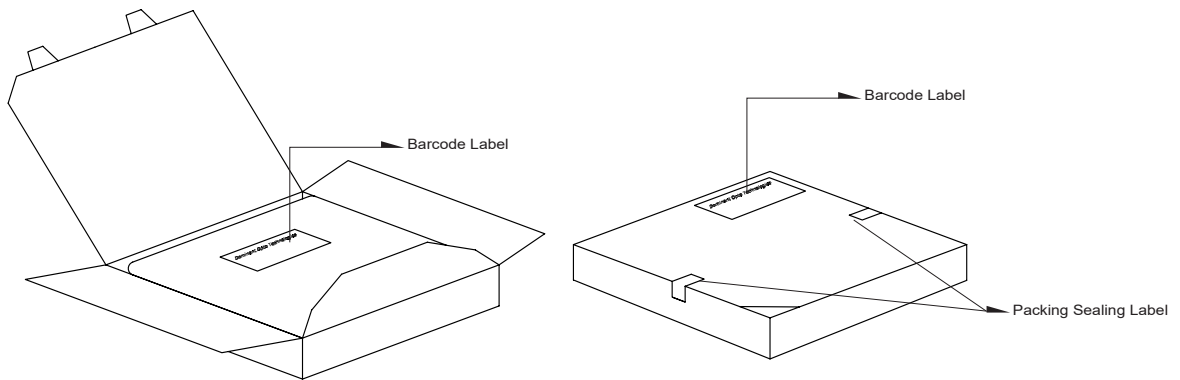

Reel Diameter (mm)	Packing Box Dimensions (mm)
180	210 x 210 x 20
329	345 x 345 x 20

Recommended Pb-free Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

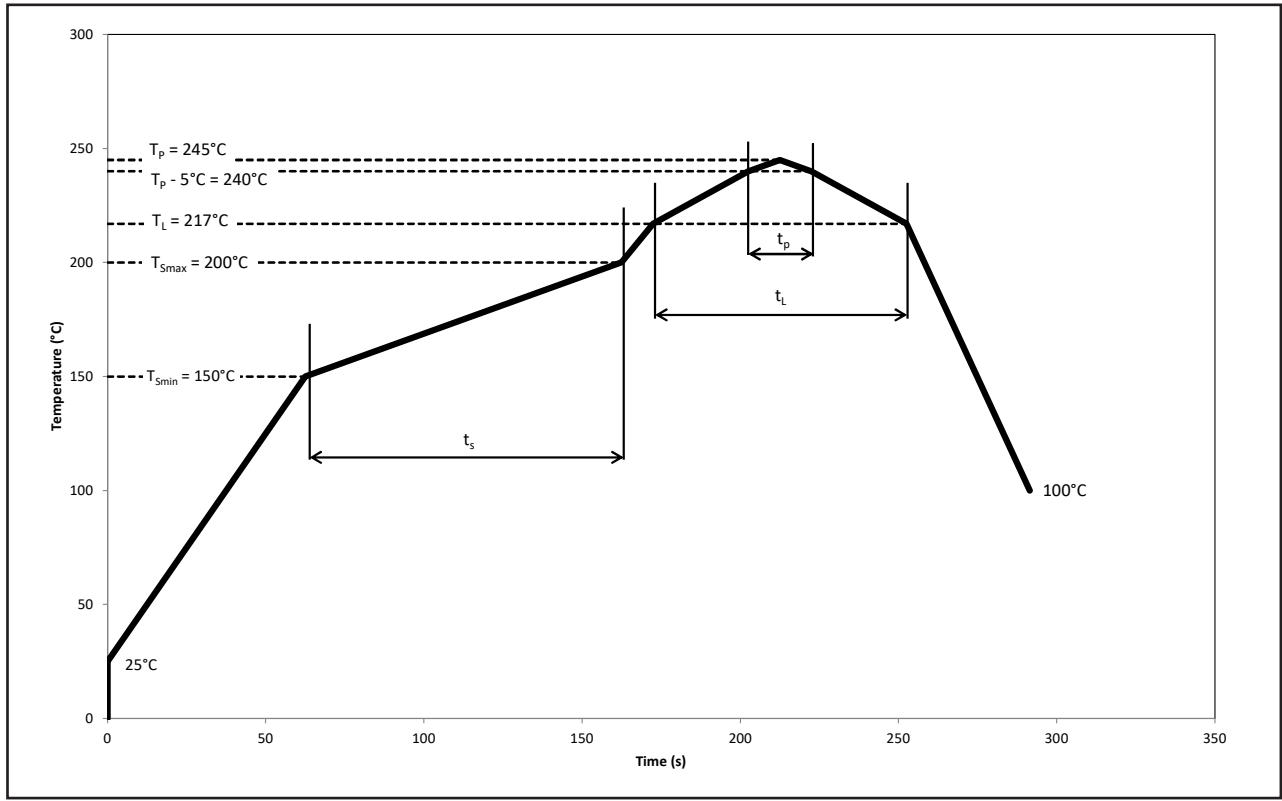

Profile Feature	Symbol	Pb-Free Assembly			Unit
		Min.	Recommended	Max.	
Ramp-up rate to preheat 25°C to T_{smin}	-	-	2	3	°C/s
Time t_s T_{smin} to T_{smax}	t_s	60	100	120	s
Ramp-up rate to peak T_L to T_p	-	-	2	3	°C/s
Liquidous temperature	T_L	-	217	-	°C
Time above liquidous temperature	t_L	60	80	150	s
Peak temperature	T_p	-	245	260	°C
Time within 5°C of the specified peak temperature $T_p - 5^\circ\text{C}$	t_p	10	20	30	s
Ramp-down rate T_p to 100°C	-	-	3	6	°C/s
Time 25°C to T_p	-	-	-	480	s

Appendix

1) **Brightness:**

- 1.1 Luminous intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.2 Luminous flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.3 Radiant intensity is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).
- 1.4 Radiant flux is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (according to GUM with a coverage factor of $k=3$).

2) **Color:**

- 2.1 Chromaticity coordinate groups are measured at current pulse 25 ms(typ) with an internal reproducibility of ± 0.005 and an expanded uncertainty of ± 0.01 (accordingly to GUM with a coverage factor of $k=3$).
- 2.2 Dominant wavelength is measured at current pulse 25 ms(typ) with an internal reproducibility of $\pm 0.5\text{nm}$ and an expanded uncertainty of $\pm 1\text{nm}$ (accordingly to GUM with a coverage factor of $k=3$).

3) **Voltage:**

- 3.1 Forward Voltage, V_f is measured when a current pulse of 8 ms(typ) with an internal reproducibility of $\pm 0.05\text{V}$ and an expanded uncertainty of $\pm 0.1\text{V}$ (accordingly to GUM with a coverage factor of $k=3$).

4) **Typical Values:**

- 4.1 At special conditions of LED manufacturing processes, typical data or calculated correlations of technical parameters only reflect the statistical figures. But not necessarily correspond to the actual parameters of each single product, which could differ from the typical data or calculated correlations or the typical characteristic line. These typical data may change whenever technical improvements happen.

5) **Tolerance of Measure**

- 5.1 Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimension are specific in mm.

About Us

DOMINANT Opto Technologies is a dynamic company that is amongst the world's leading automotive LED manufacturers. With an extensive industry experience and relentless pursuit of innovation, DOMINANT's state-of-art manufacturing and development capabilities have become a trusted and reliable brand across the globe. More information about DOMINANT Opto Technologies, an IATF 16949 and ISO 14001 certified company, can be found under <http://www.dominant-semi.com>.

Please contact us for more information:

DOMINANT Opto Technologies Sdn. Bhd.
Lot 6, Batu Berendam, FTZ Phase III, 75350 Melaka, Malaysia
Tel: (606) 283 3566 Fax: (606) 283 0566
E-mail: sales@dominant-semi.com
